

Protection of RS-485 Transceivers.

FEATURES


- 400 Watts peak pulse power ($t_p=8/20 \mu s$)
- Transient protection for data lines to IEC 61000-4-2(ESD) 15kV(Air), 8kV(Contact). IEC 61000-4-4(EFT) 40A ($t_p=5/50ns$) IEC 61000-4-5(Lightning) 12A ($t_p=8/20 \mu s$)
- Standard SOT-23 Package.
- Protects two +12V to -7V lines.
- Low Capacitance.
- Low Clamping Voltage.

APPLICATIONS


- Protection of RS-485 transceivers with extended common-mode range.
- Security Systems.
- Automatic Teller Machines.
- HFC Systems.
- Networks.

MAXIMUM RATING ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power ($t_p=8/20 \mu s$)	P_{PK}	400	W
Peak Pulse Current ($t_p=8/20 \mu s$)	I_{PP}	17	A
Operating Temperature	T_j	-55 125	
Storage Temperature	T_{stg}	-55 150	

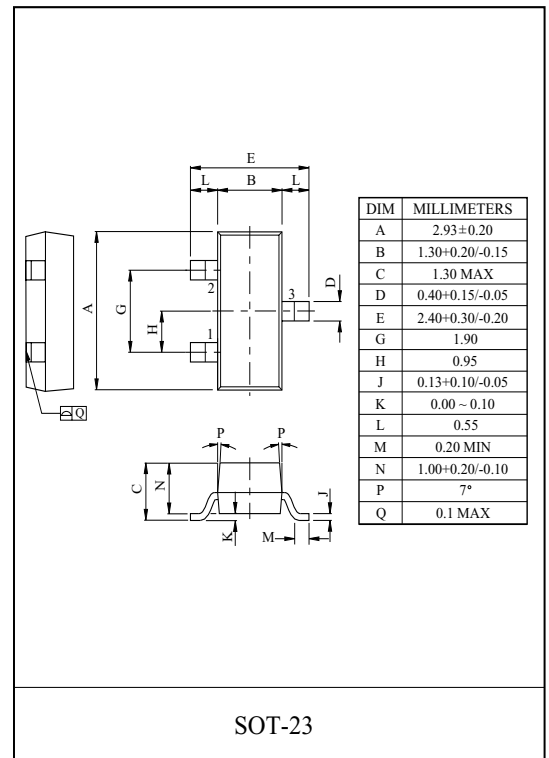

Marking

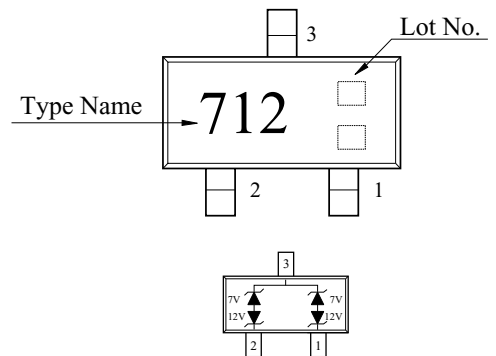

PG712FBS23

ELECTRICAL CHARACTERISTICS (Ta=25)

Pin 3 to 1 & Pin 3 to 2 (7V TVS)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	V_{RWM}	-	-	-	7	V
Reverse Breakdown Voltage	V_{BR}	$I_r=1mA$	7.5	-	-	V
Reverse Leakage Current	I_R	$V_{RWM}=7V$	-	-	20	μA
Clamping Voltage	V_C	$I_{pp}=5A, t_p=8/20 \mu s$	-	-	10	V
		$I_{pp}=17A, t_p=8/20 \mu s$	-	-	12	
Junction Capacitance	C_J	$V_R=0V, f=1MHz$	-	-	75	pF


ELECTRICAL CHARACTERISTICS (Ta=25)

Pin 1 to 3 & Pin 2 to 3 (12V TVS)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	V_{RWM}	-	-	-	12	V
Reverse Breakdown Voltage	V_{BR}	$I_r=1mA$	13.3	-	-	V
Reverse Leakage Current	I_R	$V_{RWM}=12V$	-	-	1	μA
Clamping Voltage	V_C	$I_{pp}=5A, t_p=8/20 \mu s$	-	-	20	V
		$I_{pp}=17A, t_p=8/20 \mu s$	-	-	26	
Junction Capacitance	C_J	$V_R=0V, f=1MHz$	-	-	75	pF

PG712FBS23


NON-REPETITIVE PEAK PULSE
POWER VS. PULSE TIME

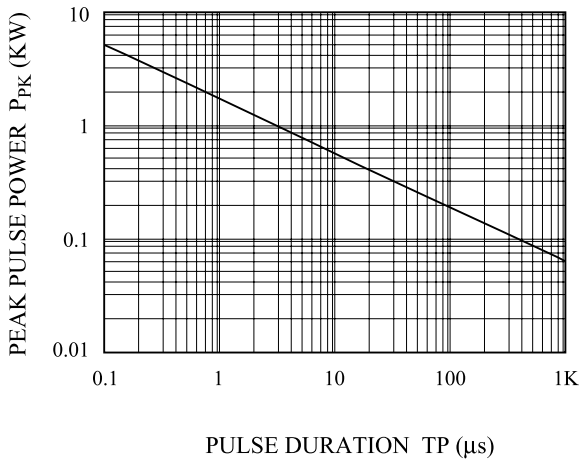


POWER DERATION CURVE

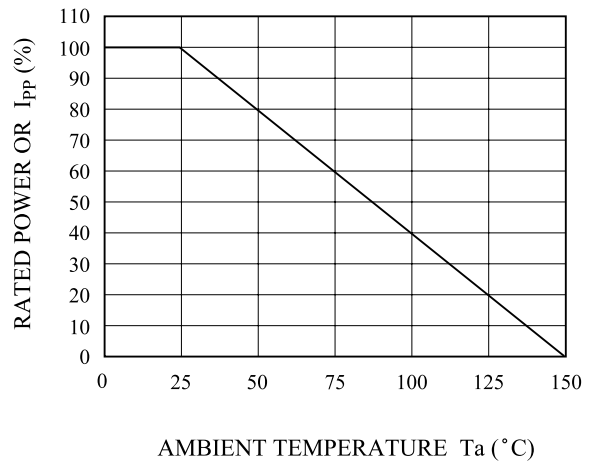

PULSE WAVEFORM

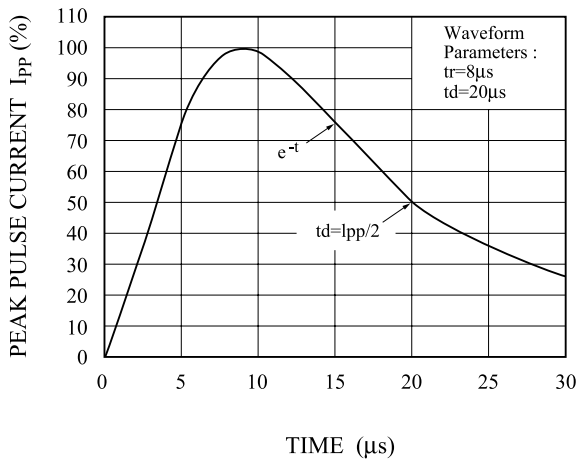

CLAMPING VOLTAGE VS.
PEAK PULSE CURRENT

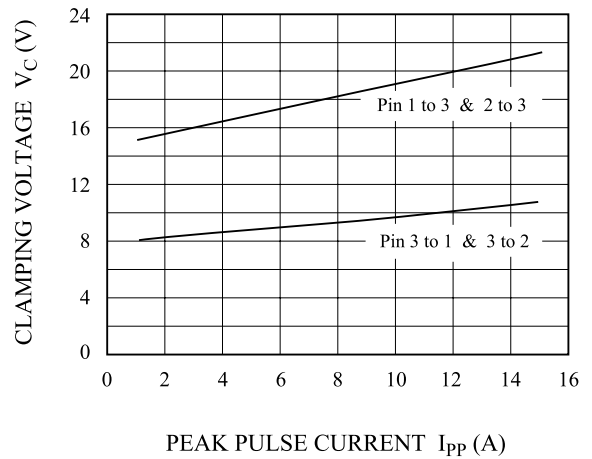

CAPACITANCE VS.
REVERSE VOLTAGE

