

**ANALOG SERIES:
PRE-AMPLIFIED IC'S FOR
HIGH GAIN 2-WIRE
MICROPHONES**

■ DESCRIPTION

The UTC **ULV1012** is high gain, high impedance per-amplifier which is designed to replace the JFET amplifier currently being used. The UTC **ULV1012** audio amplifiers are specified to operate over a 2.2V to 5.0V supply voltage range with fixed gains of 7.8dB, 15.6dB, 20.9dB, and 23.8dB. The devices offer excellent THD, gain accuracy and temperature stability as compared to a JFET microphone.

The UTC **ULV1012** series is ideally suited for applications requiring high signal integrity in the presence of ambient or RF noise, such as in cellular communications.

The UTC **ULV1012** suited for use in headsets, mobile communications, automotive accessories, PDAs, accessory microphone products and telephone Electret Condenser Microphones (ECM).

■ FEATURES

* Typical ULV1012-15, 2.2V Supply, $R_L=2.2k\Omega$, $C=2.2\mu F$, $V_{IN}=18mV_{PP}$, Unless Otherwise Specified

* Supply Voltage: 2V ~ 5V

* Supply Current: <180 μA

* Voltage Gain

– ULV1012-07: 7.8dB

– ULV1012-15: 15.6dB

– ULV1012-20: 20.9dB

– ULV1012-25: 23.8dB


* Temperature Range: -40°C~85°C

■ ORDERING INFORMATION


Ordering Number	Package	Packing
ULV1012G-xx-AG6-R	SOT-26	Tape Reel

ULV1012G-xx-AG6-R 	(1)Packing Type (2)Package Type (3)Voltage Gain (4)Green Package	(1) R: Tape Reel (2) AG6: SOT-26 (3) 07: 7.8dB, 15: 15.6dB, 20: 20.9dB, 25: 23.8dB (4) G: Halogen Free and Lead Free
----------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

■ MARKING INFORMATION

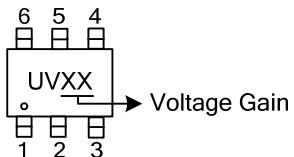PACKAGE	VOLTAGE GAIN	MARKING
SOT-26	07: 7.8dB 15: 15.6dB 20: 20dB 25: 23.8dB	

■ PIN CONFIGURATION

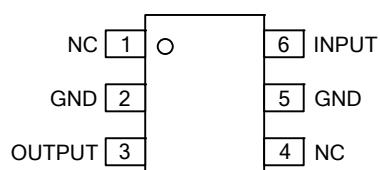

Note: Pin numbers are referenced to package marking text orientation.


The actual physical placement of the package marking will vary slightly from part to part.

The package will designate the date code and will vary considerably. Package marking does not correlate to device type in any way.

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1, 4	NC	
2, 5	GND	Ground
3	OUTPUT	Output Voltage
6	INPUT	Input Voltage

■ BLOCK DIAGRAM

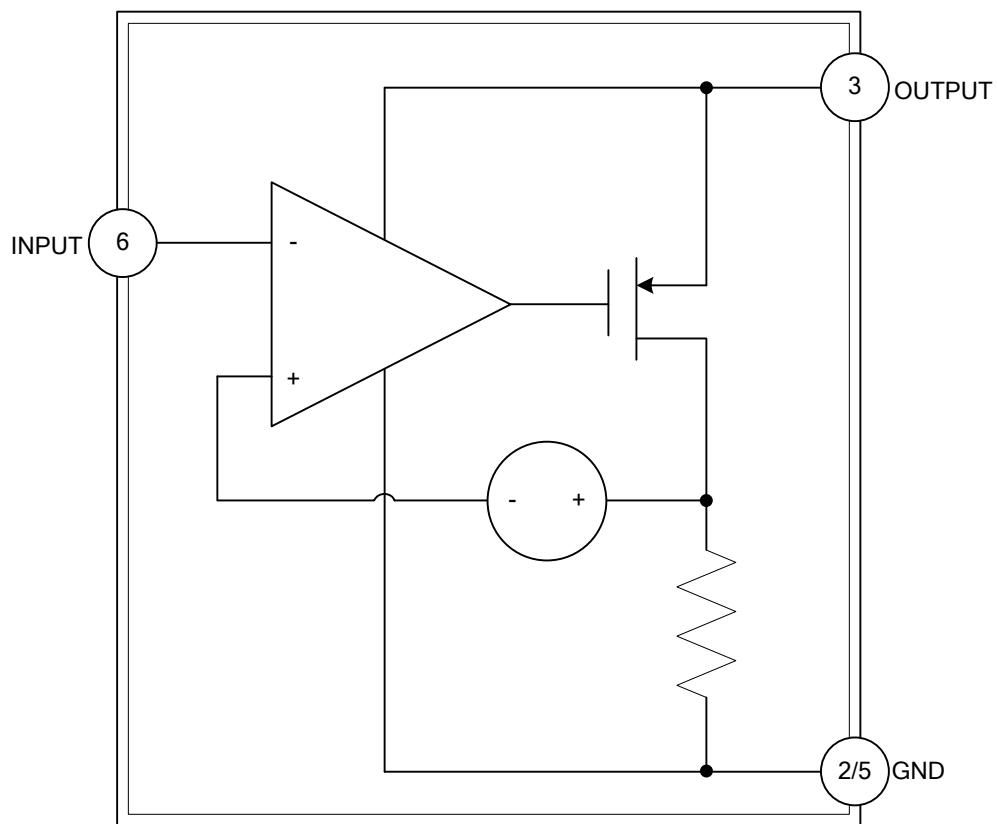

■ ABSOLUTE MAXIMUM RATING (Note 1)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage	V _{DD} -GND	V _{DD}	5.5	V
ESD Tolerance (Note 2)	Human Body Model	ESD	2500	V
	Machine Model		250	V
Junction Temperature (Note 3)		T _J	150	°C
Storage Temperature Range		T _{STG}	-65 ~ +150	°C
Mounting Temperature	Infrared or Convection (20 sec.)		235	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.
 Absolute maximum ratings are stress ratings only and functional device operation is not implied. For ensured specifications and the test conditions, see the **5V Electrical Characteristics**.

2. Human Body Model (HBM) is 1.5kΩ in series with 100pF.
3. The maximum power dissipation is a function of T_{J(MAX)}, θ_{JA} and T_A. The maximum allowable power dissipation at any ambient temperature is P_D=(T_{J(MAX)}-T_A)/θ_{JA}. All numbers apply for packages soldered directly into a PC board.

■ OPERATING RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V _{DD}	2 ~ 5	V
Temperature Range		T _J	-40 ~ +85	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
 Absolute maximum ratings are stress ratings only and functional device operation is not implied. For ensured specifications and the test conditions, see the **5V Electrical Characteristics**.

■ 2.2V ELECTRICAL CHARACTERISTICS (Note 1)

(Unless otherwise specified, all limits are specified for T_J=25°C, V_{DD}=2.2V, V_{IN}=18mV, R_L=2.2kΩ and C=2.2μF.
Boldface limits apply at the temperature extremes.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN (Note 2)	TYP (Note 3)	MAX (Note 2)	UNIT
Supply Current	I _{DD}	V _{IN} =GND	ULV1012-07		139	250	μA
			ULV1012-15			300	μA
			ULV1012-20		180	300	μA
			ULV1012-25		160	250	μA
						300	μA
					141	250	μA
Signal To Noise Ratio	SNR	f=1kHz, V _{IN} =18mV, A-Weighted	ULV1012-07		59		dB
			ULV1012-15		60		dB
			ULV1012-20		61		dB
			ULV1012-25		61		dB
Max Input Signal	V _{IN}	f=1kHz and THD+N<1%	ULV1012-07		170		mV _{PP}
			ULV1012-15		100		mV _{PP}
			ULV1012-20		50		mV _{PP}
			ULV1012-25		28		mV _{PP}

■ 2.2V ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN (Note 2)	TYP (Note 3)	MAX (Note 2)	UNIT
Output Voltage	V_{OUT}	$V_{IN}=GND$	ULV1012-07	1.65	1.90	2.03	V
			1.54		2.09		V
			ULV1012-15	1.54	1.81	1.94	V
			1.48		2.00		V
			ULV1012-20	1.65	1.85	2.03	V
			1.55		2.13		V
			ULV1012-25	1.65	1.90	2.02	V
			1.49		2.18		V
Lower -3dB Roll Off Frequency	f_{LOW}	$R_{SOURCE}=50\Omega$			65		Hz
Upper -3dB Roll Off Frequency	f_{HIGH}	$R_{SOURCE}=50\Omega$			95		kHz
Output Noise	e_n	A-Weighted	ULV1012-07		-96		dBV
			ULV1012-15		-89		dBV
			ULV1012-20		-84		dBV
			ULV1012-25		-82		dBV
Total Harmonic Distortion	THD	$f=1kHz,$ $V_{IN}=18mV$	ULV1012-07		0.10		%
			ULV1012-15		0.09		%
			ULV1012-20		0.12		%
			ULV1012-25		0.15		%
Input Capacitance	C_{IN}				2		pF
Input Impedance	Z_{IN}				>1000		GΩ
Gain	A_V	$f=1kHz,$ $R_{SOURCE}=50\Omega$	ULV1012-07	6.4	7.8	9.5	dB
			5.5		10.0		dB
			ULV1012-15	14.0	15.6	16.9	dB
			13.1		17.5		dB
			ULV1012-20	19.5	20.9	22.0	dB
			17.4		23.3		dB
			ULV1012-25	22.5	23.8	25.0	dB
			21.4		25.7		dB

Notes: 1. Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that $T_J=T_A$. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where $T_J>T_A$.

2. All limits are specified by design or statistical analysis.

3. Typical values represent the most likely parametric norm.


■ 5V ELECTRICAL CHARACTERISTICS (Note 1)

(Unless otherwise specified, all limits are specified for $T_J=25^\circ\text{C}$, $V_{DD}=5\text{V}$, $V_{IN}=18\text{mV}$, $R_L=2.2\text{k}\Omega$ and $C=2.2\mu\text{F}$.
Boldface limits apply at the temperature extremes.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN (Note 2)	TYP (Note 3)	MAX (Note 2)	UNIT
Supply Current	I_{DD}	$V_{IN}=\text{GND}$	ULV1012-07		158	250	μA
					300	300	μA
			ULV1012-15		200	300	μA
					325	325	μA
			ULV1012-20		188	260	μA
					310	310	μA
Signal To Noise Ratio	SNR	$f=1\text{kHz}$, $V_{IN}=18\text{mV}$, A-Weighted	ULV1012-07		59		dB
			ULV1012-15		60		dB
			ULV1012-20		61		dB
			ULV1012-25		61		dB
Max Input Signal	V_{IN}	$f=1\text{kHz}$ and $\text{THD+N}<1\%$	ULV1012-07		170		mV_{PP}
			ULV1012-15		100		mV_{PP}
			ULV1012-20		55		mV_{PP}
			ULV1012-25		28		mV_{PP}
Output Voltage	V_{OUT}	$V_{IN}=\text{GND}$	ULV1012-07	4.45	4.65	4.80	V
				4.38		4.85	V
			ULV1012-15	4.34	4.56	4.74	V
				4.28		4.80	V
			ULV1012-20	4.40	4.58	4.75	V
				4.30		4.85	V
Lower -3dB Roll Off Frequency	f_{LOW}	$R_{SOURCE}=50\Omega$	ULV1012-25	4.45	4.65	4.83	V
				4.39		4.86	V
Upper -3dB Roll Off Frequency	f_{HIGH}	$R_{SOURCE}=50\Omega$			67		Hz
Output Noise	e_n	A-Weighted	ULV1012-07		-96		dBV
			ULV1012-15		-89		dBV
			ULV1012-20		-84		dBV
			ULV1012-25		-82		dBV
Total Harmonic Distortion	THD	$f=1\text{kHz}$, $V_{IN}=18\text{mV}$	ULV1012-07		0.12		%
			ULV1012-15		0.13		%
			ULV1012-20		0.18		%
			ULV1012-25		0.21		%
Input Capacitance	C_{IN}				2		pF
Input Impedance	Z_{IN}				>1000		$\text{G}\Omega$
Gain	A_v	$f=1\text{kHz}$, $R_{SOURCE}=50\Omega$	ULV1012-07	6.4	8.1	9.5	dB
				5.5		10.7	dB
			ULV1012-15	14.0	15.6	16.9	dB
				13.1		17.5	dB
			ULV1012-20	19.2	21.1	22.3	dB
				17.0		23.5	dB
			ULV1012-25	22.5	23.9	25.0	dB
				21.2		25.8	dB

- Notes: 1. Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that $T_J=T_A$. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where $T_J>T_A$.
2. All limits are specified by design or statistical analysis.
 3. Typical values represent the most likely parametric norm.

- TYPICAL APPLICATION CIRCUIT

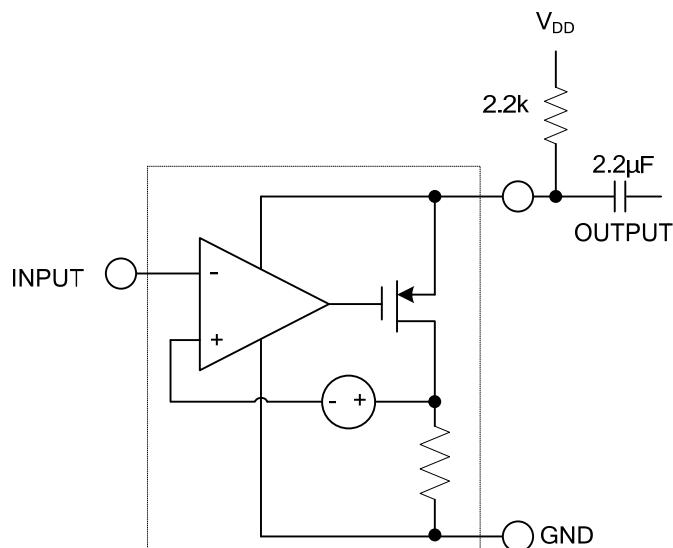

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.