

# Wall Industries, Inc.

## LANCUW8 SERIES

**4:1 Ultra Wide Input Voltage Ranges  
Single and Dual Outputs  
SMT and DIP Packages  
8 Watt DC/DC Power Converters**



### FEATURES

- Single and Dual Outputs
- 4:1 Ultra Wide Input Voltage Ranges
- High Efficiency up to 88%
- 8 Watts Output Power
- 1600VDC I/O Isolation
- Output Current up to 2.4A
- Remote ON/OFF
- Fixed Switching Frequency (300KHz)
- Over Voltage, Over Load, and Short Circuit Protection
- Five-Sided Continuous Shield
- Railway Applications
- Standard 1.25" x 0.80" x 0.40" and 24 Pin DIP Package
- SMT Package Available (Suffix "S")
- Compliant to RoHS EU Directive 2002/95/EC
- CE Mark Meets 2006/95/EC, 93/68/EEC and 2004/108/EC
- UL60950-1, EN60950-1, IEC60950-1, and EN50155 Safety Approvals (Pending)

### APPLICATIONS

- Railway Systems
- Wireless Networks
- Telecom / Datacom
- Measurement Equipment
- Industry Control Systems
- Semiconductor Equipment

### DESCRIPTION

The LANCUW8 series of DC/DC power converters provides 8 Watts of output power in a 1.25 x 0.80 x 0.40 inch DIP package. This series has single and dual output models with 4:1 wide input voltage ranges of 9-36VDC, 18-75VDC, and 43-160VDC. Some features include high efficiency up to 88%, 1600VDC I/O isolation, five-sided shielding, remote ON/OFF control, and no minimum load requirement. These converters are also protected against over voltage (single outputs only), over load, and short circuit conditions. All models are RoHS compliant and have UL60950-1, EN60950-1, IEC60950-1, and EN50155 safety approvals (pending). This series is best suited for use in wireless networks, telecom/datacom, measurement equipment, industry control systems, semiconductor equipment, and railway systems.



**Wall Industries, Inc.**

Rev. E

**LANCUW8 Series**  
**Single & Dual Outputs**  
**4:1 Input Voltage Range**  
**8 Watt DC/DC Power Converters**

SPECIFICATIONS: LANCUW8 Series							
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.							
SPECIFICATION		TEST CONDITIONS		Min	Nom	Max	Unit
<b>INPUT SPECIFICATIONS</b>							
Input Voltage Range	24VDC nominal input models			9	24	36	VDC
	48VDC nominal input models			18	48	75	
	110VDC nominal input models			43	110	160	
Input Surge Voltage (100ms max)	24VDC nominal input models				50		VDC
	48VDC nominal input models				100		
	110VDC nominal input models				170		
Start-Up Voltage	24VDC nominal input models				9		VDC
	48VDC nominal input models				18		
	110VDC nominal input models				43		
Shutdown Voltage	24VDC nominal input models			8			VDC
	48VDC nominal input models			16			
	110VDC nominal input models			42			
Input Reflected Ripple Current	Nominal Vin and full load			20			mAp-p
Remote ON/OFF (See Note 6)	DC/DC ON	Open or 3.0V < Vr < 12V					
	DC/DC OFF	Short or 0V < Vr < 1.2V					
Input Current of Remote Control Pin	Nominal Vin		-0.5		+0.5		mA
Remote Off State Input Current	Nominal Vin			2.5			mA
Input Filter					Pi type		
<b>OUTPUT SPECIFICATIONS</b>							
Output Voltage				See Table			
Line Regulation	Low line to high line at full load			-0.2		+0.2	%
Load Regulation	No load to full load	Single Output (DIP)	-0.5		+0.5		%
		Single Output (SMT)	-1		+1		
		Dual Output (DIP & SMT)	-1		+1		
Load Regulation	10% load to 90% load	Single Output (DIP)	-0.3		+0.3		%
		Single Output (SMT)	-0.8		+0.8		
		Dual Output (DIP & SMT)	-0.8		+0.8		
Cross Regulation (Dual Outputs)	Asymmetrical load 25% / 100% full load			-5		+5	%
Voltage Accuracy	Full load at nominal Vin			-1		+1	%
Output Power					8		W
Output Current				See Table			
Ripple & Noise	20MHz Bandwidth			See Table			
Transient Response Recovery Time	25% load step change				250		μs
Start-Up Time	Nom. Vin and constant resistive load		Power Up		450		ms
Minimum Load				0			%
Temperature Coefficient				-0.02		+0.02	%/°C
<b>PROTECTION</b>							
Over Load Protection	% of full load at nominal input			150			%
Short Circuit Protection				Continuous, automatic recovery			
Over Voltage Protection ( <i>Single Outputs only</i> )	3.3V output model			3.9			VDC
	5.0V output model			6.2			
	12V output model			15			
	15V output model			18			
<b>GENERAL SPECIFICATIONS</b>							
Efficiency	Nominal Vin and full load			See Table			
Switching Frequency				300			KHz
Isolation Voltage	Input to Output (DIP & SMT)		1600				VDC
	Input (Output) to Case (DIP)		1600				
	Input (Output) to Case (SMT)		1000				
Isolation Resistance				10			GΩ
Isolation Capacitance					1500		pF
<b>ENVIRONMENTAL SPECIFICATIONS</b>							
Operating Ambient Temperature (See Note 7)	5V, 12V, 15V, ±12V, & ±15V output models		without derating	-40		+78	°C
	with derating	+78		+105			
	3.3V and ±5V output models		without derating	-40	+70	+105	
Maximum Case Temperature						+105	°C
Storage Temperature				-55		+125	°C
Relative Humidity				5	95		% RH
Thermal Shock				EN61373, MIL-STD-810F			
Vibration				EN61373, MIL-STD-810F			
Thermal Impedance	Natural Convection			20			°C/Watt
MTBF (See Note 1)	BELLCORE TR-NWT-000332			2,350,000 hours			
	MIL-HDBK-217F			1,078,000 hours			
<b>PHYSICAL SPECIFICATIONS</b>							
Weight				0.62oz (18g)			
Case Material				Nickel-coated copper			
Base Material				Non-conductive black plastic			
Potting Material				Epoxy (UL94-V0)			
Dimensions (L x W x H)				1.25 x 0.80 x 0.40 inches (31.8 x 20.3 x 10.2 mm)			
<b>SAFETY &amp; EMC CHARACTERISTICS</b>							
Safety Approvals (Pending)				IEC60950-1, UL60950-1, EN60950-1, EN50155			
EMI (See Note 8)	EN55022, EN55011			Class A			
ESD	EN61000-4-2		Air Contact	±8KV ±6KV	Perf. Criteria A		
Radiated Immunity	EN61000-4-3			20 V/m	Perf. Criteria A		
Fast Transient (See Note 9)	EN61000-4-4			±2KV	Perf. Criteria A		
Surge (See Note 9)	EN61000-4-5			±2KV	Perf. Criteria A		
Conducted Immunity	EN61000-4-6			10 Vrms	Perf. Criteria A		

## MODEL SELECTION TABLES

Model Number	Input Voltage Range	Output Voltage	SINGLE OUTPUT MODELS				Output <sup>(4)</sup> Ripple & Noise	Output Power	Efficiency <sup>(4)</sup>	Maximum <sup>(5)</sup> Capacitive Load				
			Output Current		Input Current									
			Min. Load	Full Load	No Load <sup>(3)</sup>	Full Load <sup>(2)</sup>								
LANC2433UW8	24 VDC (9 - 36 VDC)	3.3 VDC	0mA	2400mA	40mA	407mA	50mVp-p	8W	85%	1330µF				
LANC2405UW8		5 VDC	0mA	1600mA	40mA	402mA	50mVp-p	8W	87%	1330µF				
LANC2412UW8		12 VDC	0mA	666mA	25mA	407mA	50mVp-p	8W	86%	288µF				
LANC2415UW8		15 VDC	0mA	533mA	25mA	407mA	50mVp-p	8W	86%	200µF				
LANC4833UW8	48 VDC (18 - 75 VDC)	3.3 VDC	0mA	2400mA	20mA	204mA	50mVp-p	8W	85%	1330µF				
LANC4805UW8		5 VDC	0mA	1600mA	20mA	201mA	50mVp-p	8W	87%	1330µF				
LANC4812UW8		12 VDC	0mA	666mA	13mA	201mA	50mVp-p	8W	87%	288µF				
LANC4815UW8		15 VDC	0mA	533mA	13mA	198mA	50mVp-p	8W	88%	200µF				
LANC11033UW8	110 VDC (43 - 160 VDC)	3.3 VDC	0mA	2400mA	8mA	82mA	75mVp-p	8W	84%	1330µF				
LANC11005UW8		5 VDC	0mA	1600mA	8mA	90mA	75mVp-p	8W	85%	1330µF				
LANC11012UW8		12 VDC	0mA	666mA	4mA	88mA	75mVp-p	8W	86%	288µF				
LANC11015UW8		15 VDC	0mA	533mA	4mA	88mA	75mVp-p	8W	86%	200µF				




## DUAL OUTPUT MODELS

Model Number	Input Voltage Range	Output Voltage	Output Current		Input Current		Output <sup>(6)</sup> Ripple & Noise	Output Power	Efficiency <sup>(4)</sup>	Maximum <sup>(5)</sup> Capacitive Load
			Min. Load	Full Load	No Load <sup>(3)</sup>	Full Load <sup>(2)</sup>				
LANC2405DUW8	24 VDC (9 - 36 VDC)	±5 VDC	0mA	±800mA	20mA	417mA	50mVp-p	8W	84%	±900µF
LANC2412DUW8		±12 VDC	0mA	±333mA	25mA	407mA	50mVp-p	8W	86%	±133µF
LANC2415DUW8		±15 VDC	0mA	±267mA	25mA	407mA	50mVp-p	8W	86%	±90µF
LANC4805DUW8	48 VDC (18 - 75 VDC)	±5 VDC	0mA	±800mA	10mA	208mA	50mVp-p	8W	84%	±900µF
LANC4812DUW8		±12 VDC	0mA	±333mA	13mA	201mA	50mVp-p	8W	87%	±133µF
LANC4815DUW8		±15 VDC	0mA	±267mA	13mA	201mA	50mVp-p	8W	87%	±90µF
LANC11005DUW8	110 VDC (43 - 160 VDC)	±5 VDC	0mA	±800mA	5mA	93mA	75mVp-p	8W	82%	±900µF
LANC11012DUW8		±12 VDC	0mA	±333mA	5mA	90mA	75mVp-p	8W	85%	±133µF
LANC11015DUW8		±15 VDC	0mA	±267mA	5mA	90mA	75mVp-p	8W	85%	±90µF


## NOTES

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25°C, Full load (Ground, Benign, controlled environment).
  2. Maximum value at nominal input voltage and full load.
  3. Typical value at nominal input voltage and no load.
  4. Typical value at nominal input voltage and full load.
  5. Test by minimum Vin and constant resistive load.
  6. The ON/OFF control pin voltage is referenced to -Vin.
  7. Operating Ambient Temperature:  
Converters can meet the railway T2 and TX temperature requirements.  
T2: -40°C to +70°C for all models, TX: -40°C to +85°C with power derating to 55% output power.
  8. The LANCUW8 series can meet EN55022 and EN55011 Class A with an external capacitor on the input pins to the converter.  
Recommended: 24Vin Models: 1µF/50V 1210 MLCC  
48Vin Models: 0.47µF/100V 1812 MLCC  
110Vin Models: 1µF/250V\*2pcs 1812 MLCC
  9. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
Recommended: 24Vin & 48Vin Models: Nippon chemi-con KY series, 220µF/100V  
110Vin Models: Nippon chemi-con KXJ series, 150µF/200V
  10. For surface mount (SMT) type add the suffix "S" to the model number. Ex: LANC2405UW8S.
  11. **CAUTION:** This power module is not internally fused. An input line fuse must always be used.
- \*Due to advances in technology, specifications subject to change without notice.*


## CHARACTERISTICS

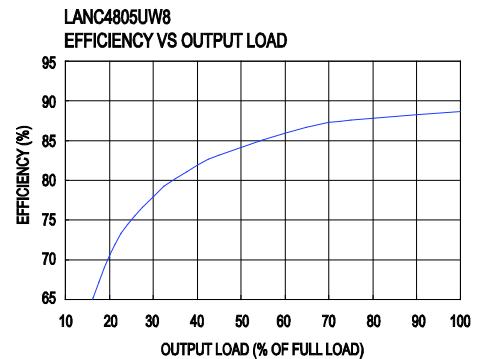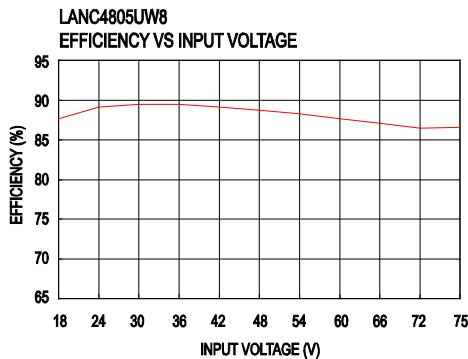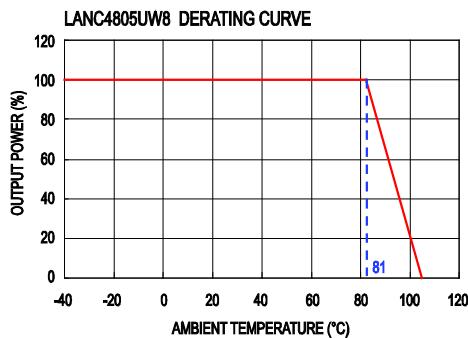

### Recommended Filter for EN55022 Class B Compliance

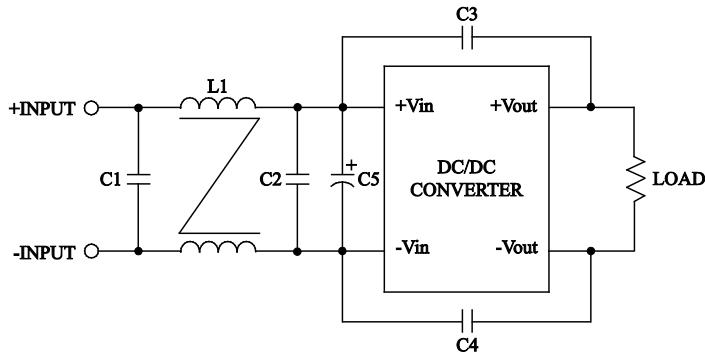

### Recommended EN55022 Class B Filter Circuit Layout

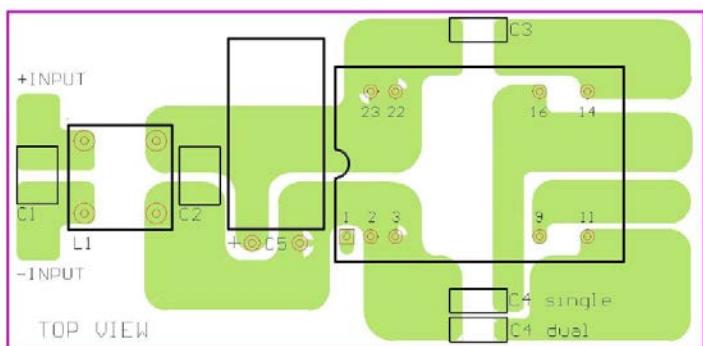

The components used in the figure above are as follows:



MODEL	C1	C2	C3	C4	C5	L1
LANC24xxUW8	4.7µF/50V 1812 MLCC	N/A	1000pF/2KV MLCC	1000pF/2KV MLCC	N/A	325µH Common Choke PMT-050
LANC48xxUW8	1.5µF/100V 1812 MLCC	1.5µF/100V 1812 MLCC	1000pF/2KV MLCC	1000pF/2KV MLCC	N/A	325µH Common Choke PMT-050
LANC110xxUW8	1µF/250V 1812 MLCC	N/A	1000pF/2KV MLCC	1000pF/2KV MLCC	22µF/200V	325µH Common Choke PMT-050

#### Common Choke L1

**PMT-050**  
L: 325µH±35% / DCR: 35mΩ, max.  
Test Conditions: 100KHz / 100mV  
Recommended Through Hole: Ø0.8mm

**PMT-017**  
L: 497µH±25% / DCR: 80mΩ, max.  
Test Conditions: 100KHz / 20mV  
Recommended Through Hole: Ø0.8mm


Unit: inches (mm)

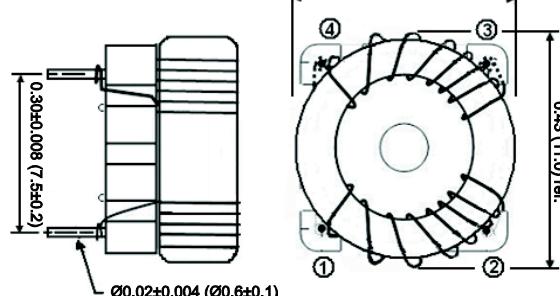

## MECHANICAL DRAWING


DIP TYPE

Unit: inches (mm)

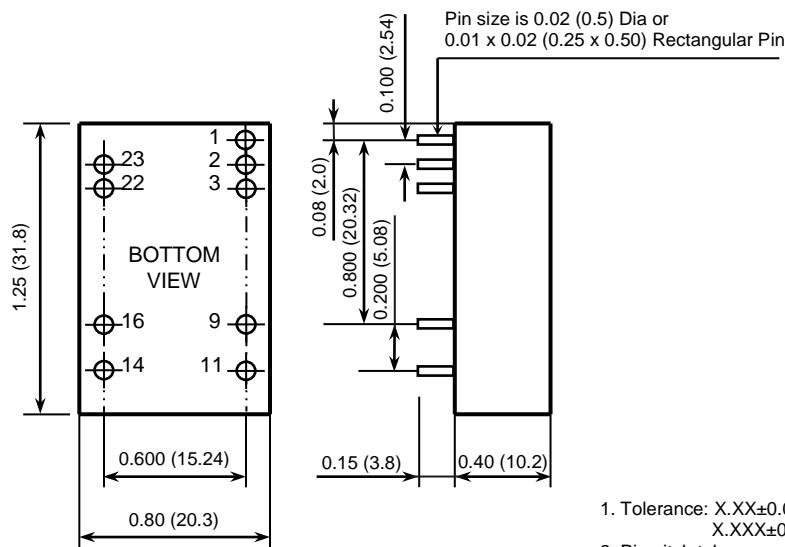

SMT TYPE  
(add Suffix "S")

Unit: inches (mm)

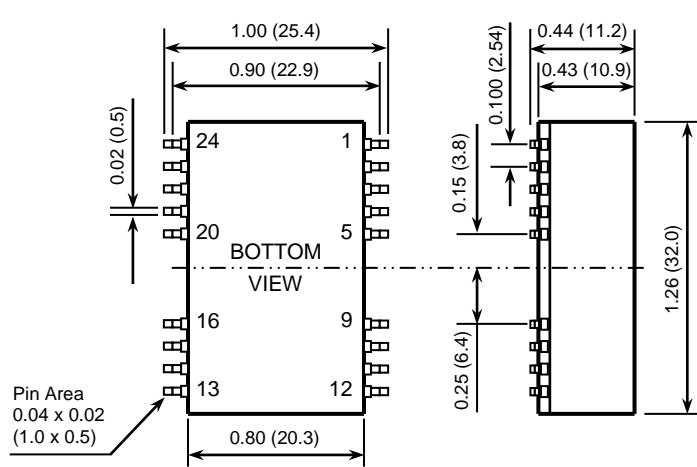

1. Tolerance:  $X.XX \pm 0.02$  ( $X \pm 0.5$ )  
 $X.XXX \pm 0.01$  ( $X.XX \pm 0.25$ )
2. Pin pitch tolerance  $\pm 0.01$  (0.25)

(DIP) PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	CTRL	CTRL			
2	-INPUT	-INPUT	23	+INPUT	+INPUT
3	-INPUT	-INPUT	22	+INPUT	+INPUT
9	NC	COMMON	16	-OUTPUT	COMMON
11	NC	-OUTPUT	14	+OUTPUT	+OUTPUT

(SMT) PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	CTRL	CTRL			
2	-INPUT	-INPUT	23	+INPUT	+INPUT
3	-INPUT	-INPUT	22	+INPUT	+INPUT
9	NC	COMMON	16	-OUTPUT	COMMON
11	NC	-OUTPUT	14	+OUTPUT	+OUTPUT
Others	NC	NC	Others	NC	NC

## COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

<u>Phone:</u>	(603)778-2300
<u>Toll Free:</u>	(888)587-9255
<u>Fax:</u>	(603)778-9797
<u>E-mail:</u>	<a href="mailto:sales@wallindustries.com">sales@wallindustries.com</a>
<u>Web:</u>	<a href="http://www.wallindustries.com">www.wallindustries.com</a>
<u>Address:</u>	5 Watson Brook Rd. Exeter, NH 03833