

isc N-Channel MOSFET Transistor

MDF10N60GTH

• FEATURES

- With TO-220 packaging
- Low switching loss
- Ultra low gate charge
- Easy to use
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operationz

• APPLICATIONS



- Switching applications
- AC-DC converters
- LED lighting
- Uninterruptible power supply

• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	600	V
V_{GSS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous @ $T_c=25^\circ\text{C}$ $T_c=100^\circ\text{C}$	10 6.3	A
I_{DM}	Drain Current-Single Pulsed	40	A
P_D	Total Dissipation	156	W
T_j	Operating Junction Temperature	-55~150	°C
T_{stg}	Storage Temperature	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	0.8	°C/W
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	°C/W

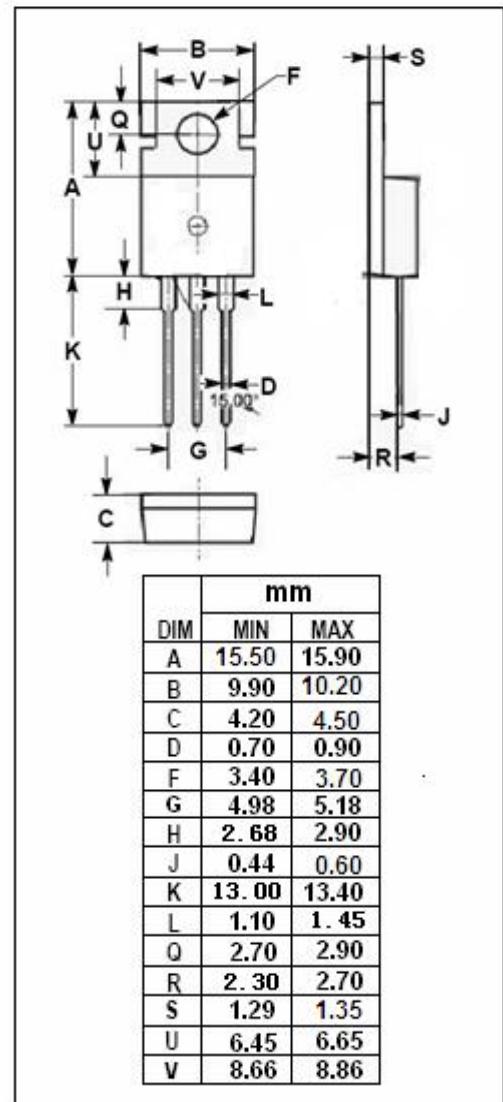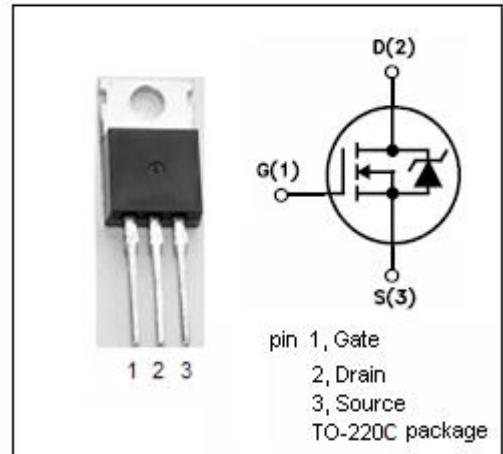

isc N-Channel MOSFET Transistor**MDF10N60GTH****ELECTRICAL CHARACTERISTICS** $T_c=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	$\text{V}_{\text{GS}}=0\text{V}; \text{I}_D= 0.25\text{mA}$	600			V
$\text{V}_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$\text{V}_{\text{DS}}=\pm 20\text{V}; \text{I}_D=0.25\text{mA}$	3		5	V
$\text{R}_{\text{DS(on)}}$	Drain-Source On-Resistance	$\text{V}_{\text{GS}}= 10\text{V}; \text{I}_D=5.3\text{A}$		580	700	$\text{m}\Omega$
I_{GSS}	Gate-Source Leakage Current	$\text{V}_{\text{GS}}= \pm 20\text{V}; \text{V}_{\text{DS}}= 0\text{V}$			± 0.1	μA
I_{DSS}	Drain-Source Leakage Current	$\text{V}_{\text{DS}}= 600\text{V}; \text{V}_{\text{GS}}= 0\text{V}$			1	μA
V_{SDF}	Diode forward voltage	$\text{I}_{\text{SD}}=10\text{A}, \text{V}_{\text{GS}} = 0\text{V}$			1.4	V