



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	0.055 ohms ±20%
D.C. RESISTANCE	7-8 @20°C	0.070 ohms ±20%
D.C. RESISTANCE	9-11 @20°C	0.033 ohms ±20%
INDUCTANCE	9-11 10kHz, 100mVAC, Ls	190uH min.
LEAKAGE INDUCTANCE	9-11 tie(2+4, 7+8), 100kHz, 50mVAC, Ls	0.4uH typ., 0.8uH max.
DIELECTRIC	2-11 tie(8+9), 1500VAC, 1 second	-
URNS RATIO	(9-11):(7-8)	2:1, ±1%
URNS RATIO	(4-2):(9-11)	1.33:1, ±1%

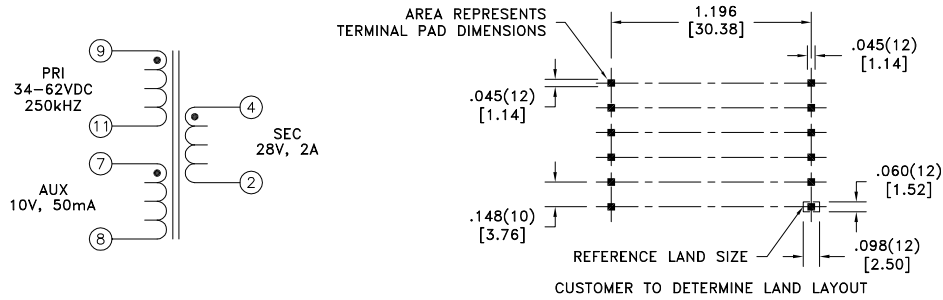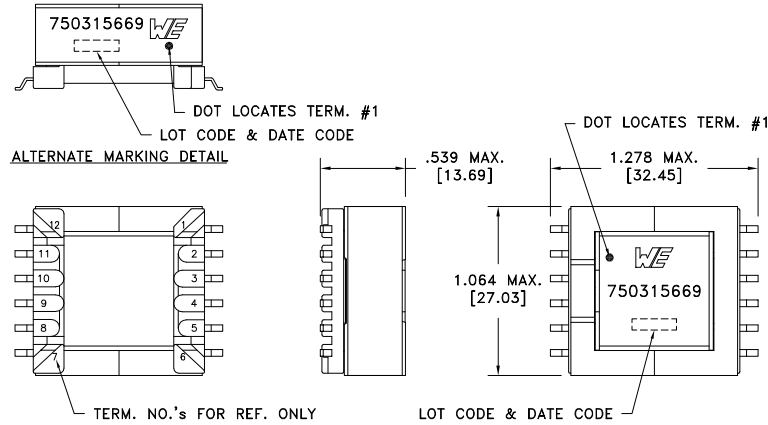

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0605 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750315669
6A	1/16	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750315669	SPECIFICATION SHEET 1 OF 1