

isc N-Channel MOSFET Transistor

FMH09N90E

• FEATURES

- With TO-3PN packaging
- Low on-resistance
- Low drive current
- Easy to use
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operationz

• APPLICATIONS



- Switching applications
- DC-DC converters
- Uninterruptible power supply

• ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{DSS}	Drain-Source Voltage	900	V
V _{GSS}	Gate-Source Voltage	±30	V
I _D	Drain Current-Continuous	9	A
I _{DM}	Drain Current-Single Pulsed	36	A
P _D	Total Dissipation	202	W
T _j	Operating Junction Temperature	-55~150	°C
T _{stg}	Storage Temperature	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th(ch-c)}	Channel-to-case thermal resistance	0.61	°C/W
R _{th(ch-a)}	Channel-to-ambient thermal resistance	50	°C/W

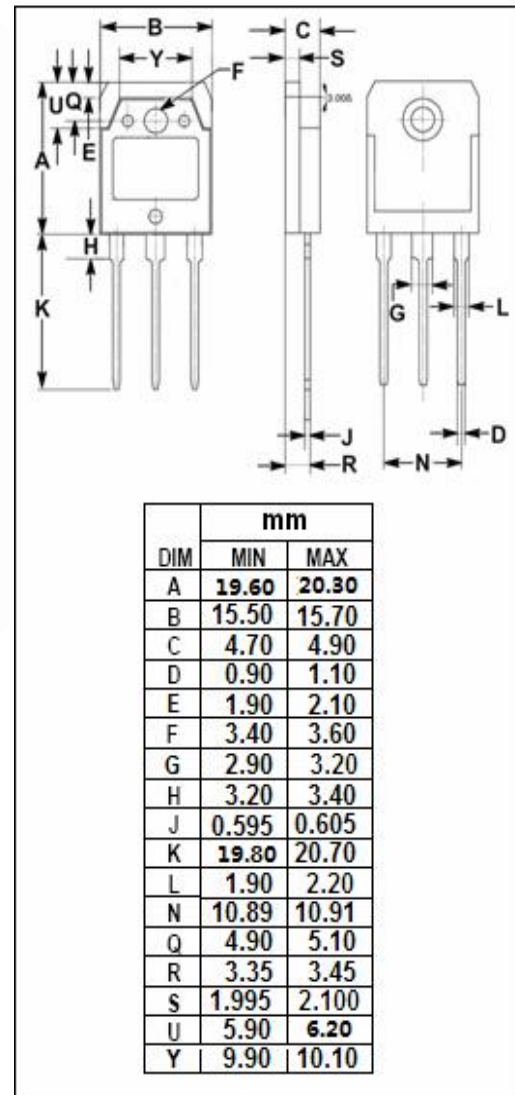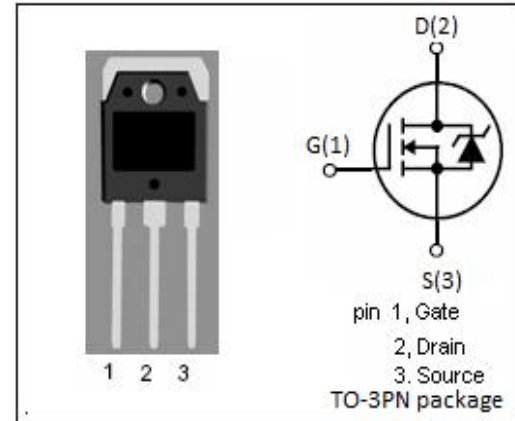

isc N-Channel MOSFET Transistor

FMH09N90E

ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = 0.25mA	900			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =±30V; I _D =0.25mA	3.5		4.5	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D =4.5A		1.16	1.4	Ω
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±30V; V _{DS} = 0V			±0.1	μA
I _{DSS}	Drain-Source Leakage Current	V _{DS} = 900V; V _{GS} =0V; T _c =25°C V _{DS} = 720V; V _{GS} = 0V; T _c =125°C			25 250	μA
V _{SDF}	Diode forward voltage	I _{SD} =9A, V _{GS} = 0 V			1.35	V