

VZT Series

Features

- $5\phi \sim 10\phi$, 105°C, 2,000 ~ 5000 hours assured
- Low impedance 30 ~ 50% less than VZS series
- Designed for surface mounting on high density PC board
- RoHS Compliance




Marking color: Black

Specifications

Items	Performance																							
Category Temperature Range	-55°C ~ +105°C																							
Capacitance Tolerance	±20% (at 120Hz, 20°C)																							
Leakage Current (at 20°C)	$I = 0.01CV$ or $3(\mu A)$ whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																							
Tan δ (at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table>	Rated Voltage	6.3	10	16	25	35	50	Tan δ (max)	0.26	0.19	0.16	0.14	0.12	0.10									
Rated Voltage	6.3	10	16	25	35	50																		
Tan δ (max)	0.26	0.19	0.16	0.14	0.12	0.10																		
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage		6.3	10	16	25	35	50	Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	Z(-55°C)/Z(+20°C)	8	5	4	3	3	3
Rated Voltage		6.3	10	16	25	35	50																	
Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2																	
	Z(-55°C)/Z(+20°C)	8	5	4	3	3	3																	
Endurance	<table border="1"> <tbody> <tr> <td>Test Time</td> <td>2,000 Hrs for $\phi D \leq 6.3mm$; 5,000 Hrs for $\phi D \geq 8mm$</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 ~ 5,000 hours at 105°C.</p>	Test Time	2,000 Hrs for $\phi D \leq 6.3mm$; 5,000 Hrs for $\phi D \geq 8mm$	Capacitance Change	Within ±30% of initial value	Tan δ	Less than 200% of specified value	Leakage Current	Within specified value															
Test Time	2,000 Hrs for $\phi D \leq 6.3mm$; 5,000 Hrs for $\phi D \geq 8mm$																							
Capacitance Change	Within ±30% of initial value																							
Tan δ	Less than 200% of specified value																							
Leakage Current	Within specified value																							
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance.																							
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th>Freq. (Hz)</th> <th>120</th> <th>1K</th> <th>10k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Cap. (μF)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Under 470</td> <td>0.65</td> <td>0.85</td> <td>0.95</td> <td>1.00</td> </tr> <tr> <td>560 < C < 2200</td> <td>0.70</td> <td>0.90</td> <td>0.95</td> <td>1.00</td> </tr> </tbody> </table>	Freq. (Hz)	120	1K	10k	10k up	Cap. (μF)					Under 470	0.65	0.85	0.95	1.00	560 < C < 2200	0.70	0.90	0.95	1.00			
Freq. (Hz)	120	1K	10k	10k up																				
Cap. (μF)																								
Under 470	0.65	0.85	0.95	1.00																				
560 < C < 2200	0.70	0.90	0.95	1.00																				

Diagram of Dimensions

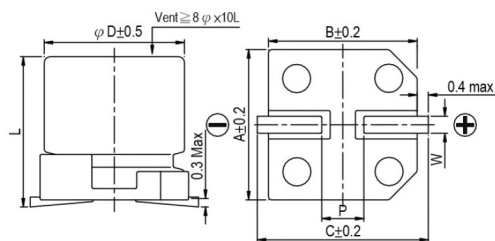

Lead Spacing and Diameter



Unit: mm

ϕD	L	A	B	C	W	P ± 0.2
5	5.8 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5
6.3	5.8 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	10 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1
10	10 ± 0.5	10.4	10.4	11	0.7 ~ 1.3	4.7

Marking

$\phi D \leq 6.3mm$

$\phi D = 8 \sim 10mm$





Aluminum Electrolytic Capacitors

VZT

Dimension: $\phi D \times L$ (mm)
 Ripple Current: mA/rms at 100k Hz, 105°C
 Impedance: Ω / at 100k Hz, 20°C

Dimension & Permissible Ripple Current

μF	V. DC Contents	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)		
		$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
10																	4×5.8	2.30	85
22	220										4×5.8	0.85	160	4×5.8	0.85	160	5×5.8	0.88	165
33	330										4×5.8	0.85	160	5×5.8	0.36	240			
47	470							4×5.8	0.85	160	5×5.8	0.36	240	5×5.8	0.36	240	6.3×5.8	0.68	195
68	680				4×5.8	0.85	160	5×5.8	0.36	240	5×5.8	0.36	240	6.3×5.8	0.26	300			
100	101	4×5.8	0.85	160				5×5.8	0.36	240	6.3×5.8	0.26	300	6.3×5.8	0.26	300	6.3×7.7	0.34	350
150	151				5×5.8	0.36	240	6.3×5.8	0.26	300	6.3×7.7	0.16	600	6.3×7.7	0.16	600			
220	221	5×5.8	0.36	240	6.3×5.8	0.26	300	6.3×5.8	0.26	300	6.3×7.7	0.16	600				8×10	0.18	670
330	331	6.3×5.8	0.26	300	6.3×7.7	0.16	600	6.3×7.7	0.16	600				8×10	0.08	850	10×10	0.12	900
470	471	6.3×7.7	0.16	600	6.3×7.7	0.16	600				8×10	0.08	850						
560	561													10×10	0.06	1,190			
680	681	6.3×7.7	0.16	600				8×10	0.08	850									
820	821										10×10	0.06	1,190						
1,000	102				8×10	0.08	850	10×10	0.06	1,190									
1,500	152	8×10	0.08	850	10×10	0.06	1,190												
2,200	222	10×10	0.06	1,190															

Part Numbering System

VZS series	1500 μF	$\pm 20\%$	6.3V	Carrier Tape		8 $\phi \times 10L$	Pb-free and PET coating case
VZT	152	M	0J	TR	-	0810	Lead Wire and Coating Type
Series name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size	

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 13.