

unit: mm



Descriptions

• High voltage application


Features

- High collector-emitter voltage : V_{CEO}=-300V
- Complementary pair with STC42N

Ordering Information

| Type NO. | Marking | Package Code | | |
|----------|---------|--------------|--|--|
| STA92N | STA92 | T0-92N | | |

Outline Dimensions

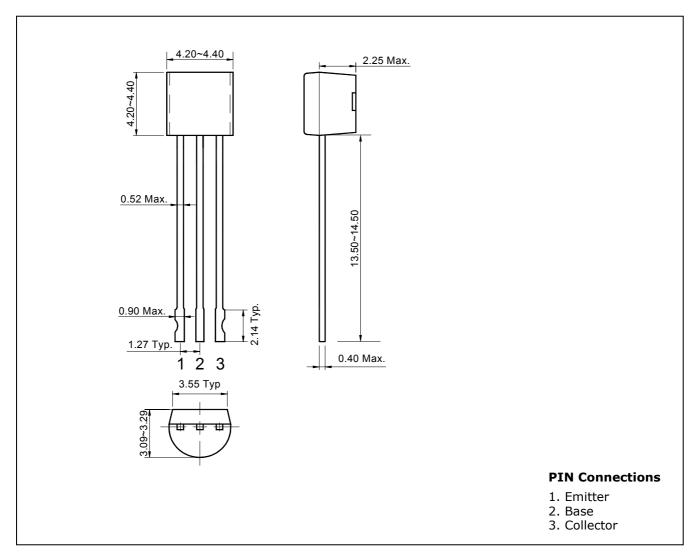

KSD-T0C029-001

Absolute Maximum Ratings

(Ta=25°C)

| Characteristic | Symbol | Rating | Unit |
|-----------------------------|----------------|---------|------|
| Collector-base voltage | V_{CBO} | -300 | V |
| Collector-emitter voltage | V_{CEO} | -300 | V |
| Emitter-base voltage | V_{EBO} | -6 | V |
| Collector current | I_{C} | -500 | mA |
| Collector power dissipation | P _C | 400 | mW |
| Junction temperature | T _J | 150 | °C |
| Storage temperature range | T_{stg} | -55~150 | °C |

Electrical Characteristics

(Ta=25°C)

| Characteristic | Symbol | Test Condition | Min. | Тур. | Max. | Unit |
|--------------------------------------|------------------------|---|------|------|------|------|
| Collector-emitter breakdown voltage | BV _{CEO} | $I_C=-1$ mA, $I_B=0$ | -300 | - | - | V |
| Collector cut-off current | I_{CBO} | V _{CB} =-300V, I _E =0 | - | - | -0.1 | μА |
| Emitter cut-off current | I_{EBO} | V_{EB} =-6V, I_C =0 | _ | - | -0.1 | μА |
| DC current gain | h _{FE} * | V_{CE} =-10V, I_{C} =-30mA | 40 | - | - | - |
| Collector-emitter saturation voltage | V _{CE(sat)} * | I_C =-20mA, I_B =-2mA | - | - | -0.5 | V |
| Base-emitter saturation voltage | $V_{BE(sat)}^{*}$ | I_C =-20mA, I_B =-2mA | - | - | -0.9 | V |
| Base-emitter voltage | V_{BE} | V_{CE} =-10V, I_{C} =-30mA | - | -0.7 | -0.9 | V |
| Transition frequency | f_{T} | V_{CE} =-20V, I_{C} =-10mA | - | 80 | ı | MHz |
| Collector output capacitance | C_{ob} | V_{CB} =-20V, I_E =0, f=1MHz | - | 3 | ı | pF |

^{* :} Pulse Tester : Pulse Width≤ 300 \(\mu \sigma \), Duty Cycle≤ 2.0%

KSD-T0C029-001 2

Electrical Characteristic Curves

Fig. 1 h_{FE} - I_C

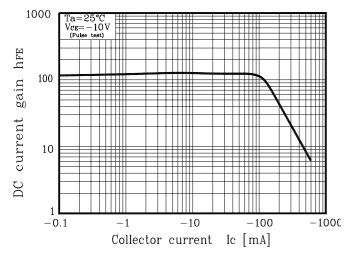


Fig. 2 $V_{CE(sat)}$, $V_{BE(sat)}$ - I_C

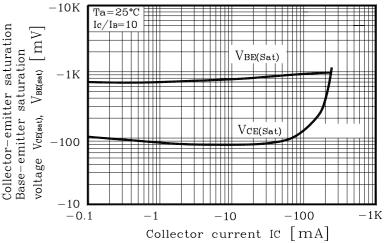


Fig. 3 $f_T - I_C$


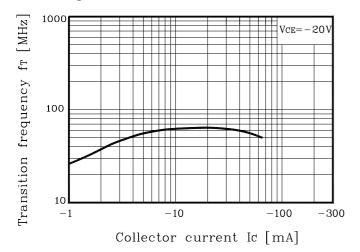


Fig. 4 Cob - VCB

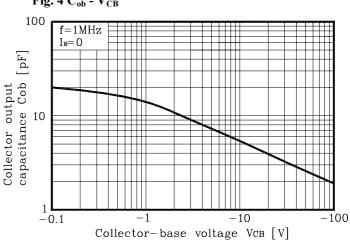

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.

KSD-T0C029-001 3