





LBN38001 SAW Filter Electrical Characteristic


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	379.8	380	380.2
Insertion Loss	dB		21.69	25
3dB Bandwidth	MHz	20	20.16	
40dB Bandwidth	MHz		24.58	25.4
Passband Variation	dB		1.5	2.0
Ultimate Rejection	dB	40	41	
Substrate Material		128 -LiNbO ₃		
Ambient Temperature	C	25		
Package Size		DIP2212(22.1*12.7*5mm ³)		

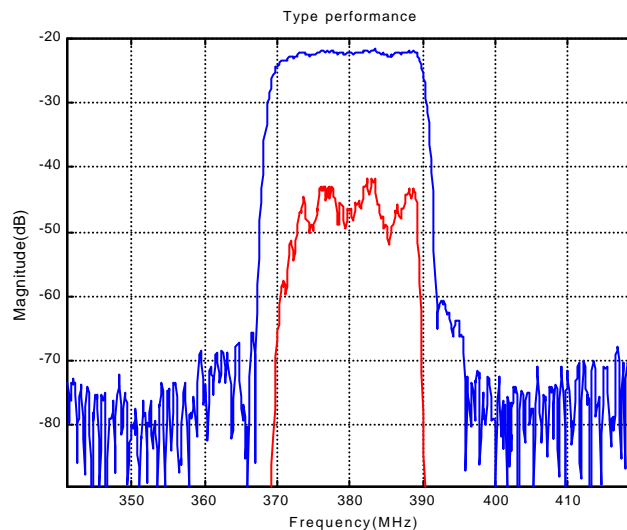

LBN38001 SAW Filter Typical Performance

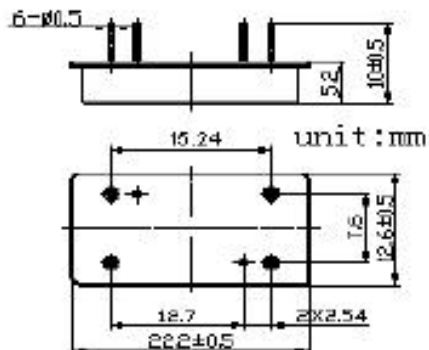

Package Outline

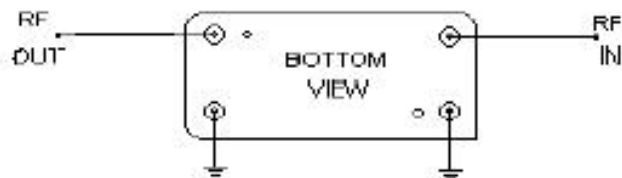

Source/Load Impedance=50ohm

Matching Configurate