

KR Electronics

General Description


KR Electronics part number 2915 is a 60 MHz elliptic bandpass filter. The filter has a minimum 1 dB bandwidth of 36 MHz. Other center frequencies and bandwidths available. Please consult the factory.

Features


- 60 MHz Bandpass
- Minimum 1 dB Bandwidth of 36 MHz
- Elliptic Response
- SMA Connectors
- Also available in surface mount
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 10 nsec/div)

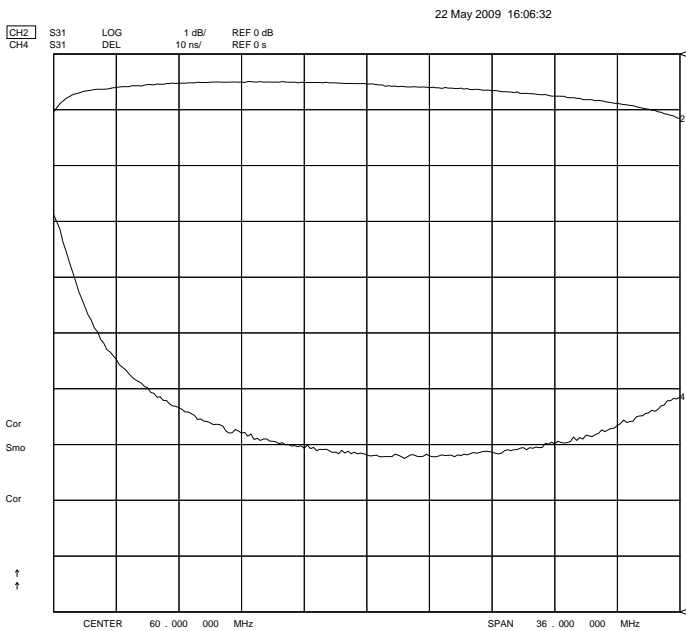

Overall Response
(10 dB/div)

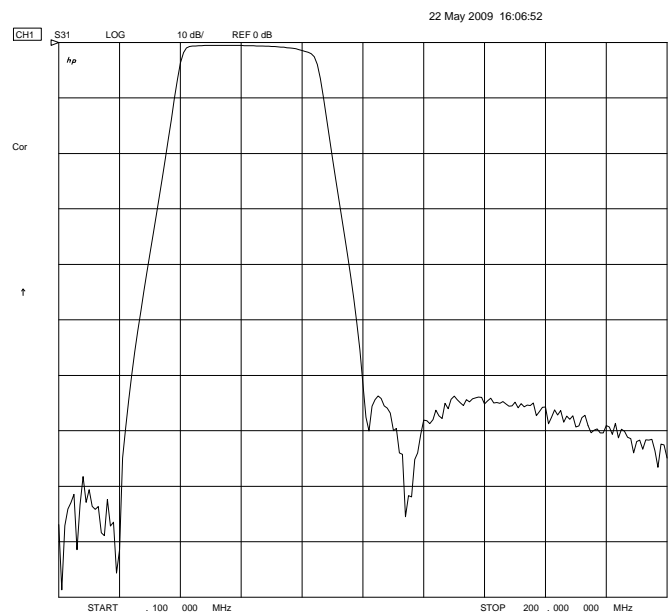

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2915

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	60 MHz
Insertion Loss	< 1 dB (0.6 dB typical)
1 dB Bandwidth	36 MHz min
Attenuation at 20 MHz	> 60 dB (>75 dB typical)
Attenuation at 100 MHz	> 45 dB (60 dB typical)
Source and Load	50 Ω

Physical Dimensions

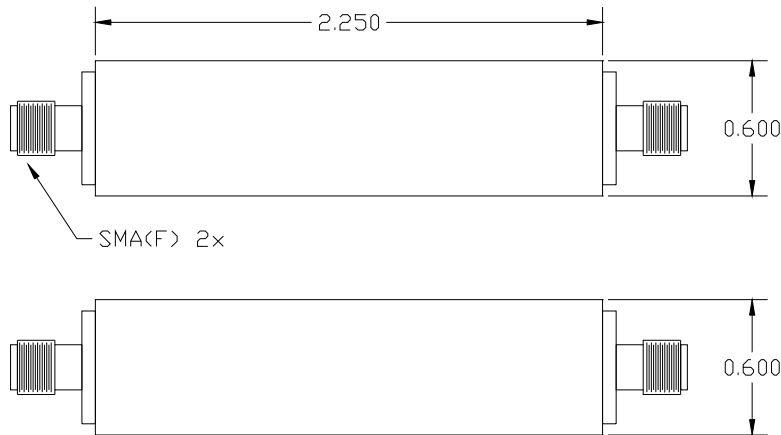

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in surface mount package

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982