

PMEG2010AEH

20 V, 1 A very low V_F MEGA Schottky barrier rectifier in SOD123F package

Rev. 02 — 26 May 2005

Product data sheet



1. Product profile

1.1 General description

Planar Maximum Efficiency General Application (MEGA) Schottky barrier rectifier with an integrated guard ring for stress protection encapsulated in a SOD123F small SMD plastic package.

1.2 Features

Forward current: 1 A

Reverse voltage: 20 V

- Very low forward voltage
- Small and flat lead SMD package

1.3 Applications

- Low voltage rectification
- High efficiency DC-to-DC conversion
- Switch mode power supply
- Inverse polarity protection
- Low power consumption applications

1.4 Quick reference data

Table 1: Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
I _F	forward current	T _{sp} ≤ 55 °C	-	-	1	Α
V_{R}	reverse voltage		-	-	20	V
V _F	forward voltage	I _F = 1 A	<u>[1]</u> -	380	430	mV

[1] Pulse test: $t_0 \le 300 \,\mu\text{s}$; $\delta \le 0.02$.



2. Pinning information

Table 2: Pinning

Pin	Description	Simplified outline	Symbol
1	cathode	[1]	
2	anode	1 2	1 🖊 2
			sym001

^[1] The marking bar indicates the cathode.

3. Ordering information

Table 3: Ordering information

Type number	Package		
	Name	Description	Version
PMEG2010AEH	-	plastic surface mounted package; 2 leads	SOD123F

4. Marking

Table 4: Marking codes

Type number	Marking code
PMEG2010AEH	AF

5. Limiting values

Table 5: Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_R	reverse voltage		-	20	V
I _F	forward current	T _{sp} ≤ 55 °C	-	1	А
I _{FRM}	repetitive peak forward current	$t_p \le 1$ ms; $\delta \le 0.5$	-	7	A
I _{FSM}	non-repetitive peak forward current	t = 8 ms; square wave	-	9	А
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C	<u>[1]</u> _	375	mW
			[2] _	830	mW
Tj	junction temperature		-	150	°C
T _{amb}	ambient temperature		-65	+150	°C
T _{stg}	storage temperature		-65	+150	°C

^[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

9397 750 15079

© Koninklijke Philips Electronics N.V. 2005. All rights reserved.

^[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1 cm².

6. Thermal characteristics

Table 6: Thermal characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R _{th(j-a)}	thermal resistance from	in free air	[1][2]	-	330	K/W
	junction to ambient		[2] [3]	-	150	K/W
R _{th(j-sp)}	thermal resistance from junction to solder point		-	-	60	K/W

^[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

7. Characteristics

Table 7: Characteristics


 T_{amb} = 25 °C unless otherwise specified.

· allib — -						
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V _F forward voltage			<u>[1]</u>			
	I _F = 0.01 A	-	200	220	mV	
		I _F = 0.1 A	-	265	290	mV
		I _F = 1 A	-	380	430	mV
I _R	reverse current	V _R = 5 V	-	15	50	μΑ
	V _R = 10 V	-	20	80	μΑ	
		V _R = 20 V	-	50	200	μΑ
C_d	diode capacitance	$V_R = 1 V$; $f = 1 MHz$	-	55	70	pF

^[1] Pulse test: $t_p \le 300~\mu s;~\delta \le 0.02.$


^[2] For Schottky barrier diodes thermal run-away has to be considered, as in some applications, the reverse power losses P_R are a significant part of the total power losses. Nomograms for determination of the reverse power losses P_R and $I_{F(AV)}$ rating will be available on request.

^[3] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1 cm².




- (1) $T_{amb} = 125 \, ^{\circ}C$
- (2) $T_{amb} = 85 \, ^{\circ}C$
- (3) $T_{amb} = 25 \,^{\circ}C$
- (4) $T_{amb} = -40 \, ^{\circ}C$

Fig 1. Forward current as a function of forward voltage; typical values



- (1) $T_{amb} = 125 \, ^{\circ}C$
- (2) $T_{amb} = 85 \, ^{\circ}C$
- (3) $T_{amb} = 25 \, ^{\circ}C$
- (4) $T_{amb} = -40 \, ^{\circ}C$


Fig 2. Reverse current as a function of reverse voltage; typical values



 T_{amb} = 25 °C; f = 1 MHz

Fig 3. Diode capacitance as a function of reverse voltage; typical values

8. Package outline

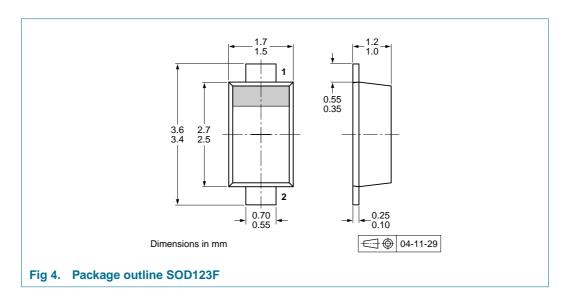

9. Packing information


Table 8: Packing methods

The indicated -xxx are the last three digits of the 12NC ordering code. [1]

Type number	Package	Description	Packing quantity	
			3000	10000
PMEG2010AEH	SOD123F	4 mm pitch, 8 mm tape and reel	-115	-135

^[1] For further information and the availability of packing methods, see $\underline{\text{Section 16}}$.

10. Soldering

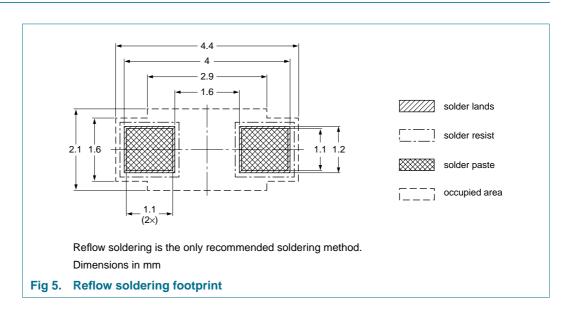

9397 750 15079

© Koninklijke Philips Electronics N.V. 2005. All rights reserved.



11. Revision history

Table 9: Revision history

Document ID	Release date	Data sheet status	Change notice	Doc. number	Supersedes
PMEG2010AEH_2	20050526	Product data sheet	-	9397 750 15079	PMEG2010AEH_1
Modifications:	Modifications: • Table 5 "Limiting values" I _{FSM} value changed to 9 A				
PMEG2010AEH_1	20050408	Product data sheet	-	9397 750 14882	-

12. Data sheet status

Level	Data sheet status [1]	Product status [2] [3]	Definition
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

- [1] Please consult the most recently issued data sheet before initiating or completing a design.
- [2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL http://www.semiconductors.philips.com.
- [3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

13. Definitions

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

14. Disclaimers

Life support — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors

customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

15. Trademarks

Notice — All referenced brands, product names, service names and trademarks are the property of their respective owners.

16. Contact information

For additional information, please visit: http://www.semiconductors.philips.com
For sales office addresses, send an email to: sales.addresses@www.semiconductors.philips.com

Philips Semiconductors

PMEG2010AEH

20 V, 1 A very low V_F MEGA Schottky barrier rectifier

17. Contents

1	Product profile	1
1.1	General description	1
1.2	Features	
1.3	Applications	
1.4	Quick reference data	
2	Pinning information	2
3	Ordering information	2
4	Marking	2
5	Limiting values	2
6	Thermal characteristics	3
7	Characteristics	3
3	Package outline	5
9	Packing information	5
10	Soldering	5
11	Revision history	6
12	Data sheet status	7
13	Definitions	7
14	Disclaimers	7
15	Trademarks	
16	Contact information	

© Koninklijke Philips Electronics N.V. 2005

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: 26 May 2005 Document number: 9397 750 15079

