

Technical Data Sheet

White SMD Surface Mount Device

67-11UWC/S400-XX/TR8

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Emission Color:x=0.29,y=0.30
- Pb free.
- The product itself will remain within RoHS compliant version.

Descriptions

The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence. The mixture of blue light and yellow light results in a white emission.



Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

| Chip | | |
|----------|---------------|-------------|
| Material | Emitted Color | Lens Color |
| InGaN | Pure White | Water Clear |


Everlight Electronics Co., Ltd.

Device No.: DSE-671-351

http://www.everlight.com Date:05-Mar-2006 Rev. 1 Page: 1 of 11
Prepared by:Teresa Lee

67-11UWC/S400-XX/TR8

Package Dimensions

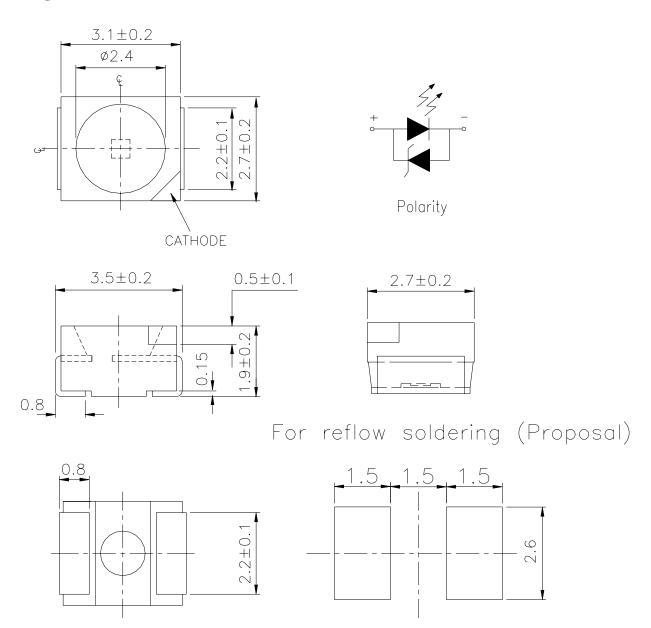

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm



67-11UWC/S400-XX/TR8

Absolute Maximum Ratings (Ta=25°C)

| <u> </u> | | | |
|--|--------|---|-------------------------|
| Parameter | Symbol | Rating | Unit |
| Reverse Voltage | VR | 5 | V |
| Forward Current | IF | 25 | mA |
| Operating Temperature | Topr | -40 ~ +85 | $^{\circ}\! \mathbb{C}$ |
| Storage Temperature | Tstg | -40 ~ +90 | °C |
| Electrostatic Discharge(HBM) | ESD | 2000 | V |
| Power Dissipation | Pd | 110 | mW |
| Peak Forward Current (Duty 1/10 @1KHz) | Ifp | 100 | mA |
| Soldering Temperature | Tsol | Reflow Soldering: 260 Hand Soldering: 35 | |

Rev. 1

Page: 3 of 11



67-11UWC/S400-XX/TR8

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

| Parameter | Symbol | Rank | Min. | Тур. | Max. | Units | Condition |
|--------------------|--|------|------|------|------|-------|-------------|
| | | A4 | 100 | 290 | | | |
| | A5 A6 I _V X7 X8 X9 X10 V _F | A5 | 200 | 360 | | mcd | I_F =20mA |
| | | A6 | 240 | 450 | | | |
| Luminous Intensity | | X7 | 400 | 630 | | | |
| | | X8 | 500 | 750 | | | |
| | | Х9 | 600 | 900 | | | |
| Forward Voltage | | X10 | 720 | 1100 | | | |
| | | | 2.70 | 3.30 | 3.70 | | |
| Viewing Angle | 2 0 1/2 | | | 120 | | deg | |

*67-11UWC/S400-XX/TR8

Chip Rank

Device No.: DSE-671-351



67-11UWC/S400-XX/TR8

Chromaticity Coordinates Specifications for Bin Grading

 $I_F=20mA$

Color Ranks

| | | A0 | | | | |
|---|-------|-------|-------|-------|--|--|
| X | 0.280 | 0.264 | 0.283 | 0.296 | | |
| У | 0.248 | 0.267 | 0.305 | 0.276 | | |

| | | В3 | | | | |
|---|-------|-------|-------|-------|--|--|
| X | 0.287 | 0.283 | 0.304 | 0.307 | | |
| У | 0.295 | 0.305 | 0.33 | 0.315 | | |


| | B4 | | | |
|---|-------|-------|-------|-------|
| X | 0.307 | 0.304 | 0.330 | 0.330 |
| У | 0.315 | 0.330 | 0.360 | 0.339 |

| | | B5 | | | | |
|---|-------|-------|-------|-------|--|--|
| X | 0.296 | 0.287 | 0.307 | 0.311 | | |
| y | 0.276 | 0.295 | 0.315 | 0.294 | | |

| | В6 | | | | |
|---|-------|-------|-------|-------|--|
| X | 0.311 | 0.307 | 0.330 | 0.330 | |
| У | 0.294 | 0.315 | 0.339 | 0.318 | |

| | | C0 | | | | |
|---|-------|-------|-------|-------|--|--|
| X | 0.330 | 0.330 | 0.361 | 0.356 | | |
| у | 0.318 | 0.360 | 0.385 | 0.351 | | |

CIE Chromaticity Diagram

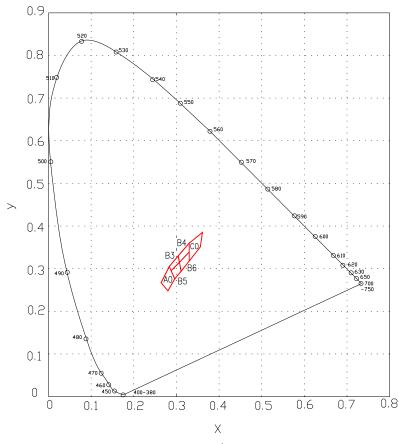

*The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.02).


Everlight Electronics Co., Ltd.


Device No.: DSE-671-351


http://www.everlight.com Date:05-Mar-2006 Rev. 1 Page: 5 of 11 Prepared by:Teresa Lee


67-11UWC/S400-XX/TR8


Typical Electro-Optical Characteristics Curves

















67-11UWC/S400-XX/TR8

Label explanation


CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank

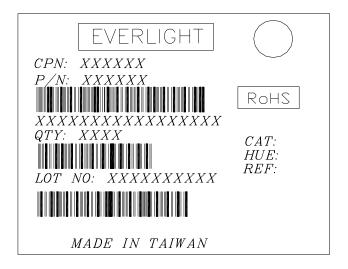

Reel Dimensions

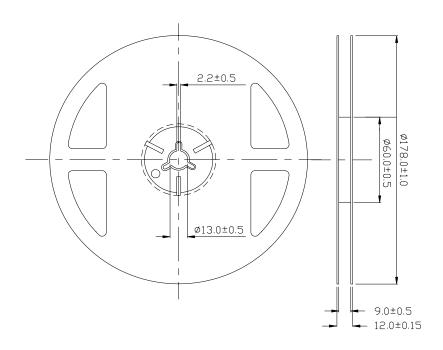


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Device No.: DSE-671-351


67-11UWC/S400-XX/TR8

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

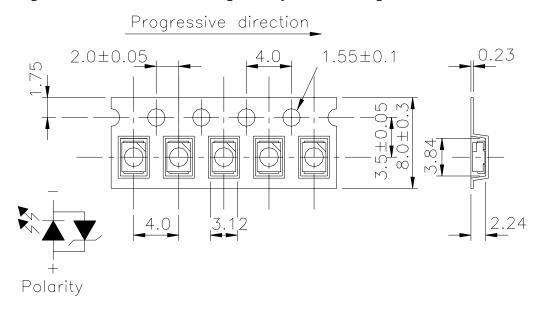

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

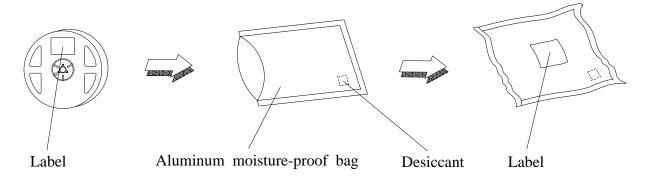



67-11UWC/S400-XX/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

| No. | Items | Test Condition | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|-------------------------------------|---|----------------------|----------------|-------|
| 1 | Reflow Soldering | Temp. : 260°C±5°C Min. 5sec. | 6 min | 22 PCS. | 0/1 |
| 2 | Temperature Cycle | $H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min | 300 Cycles | 22 PCS. | 0/1 |
| 3 | Thermal Shock | $H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min | 300 Cycles | 22 PCS. | 0/1 |
| 4 | High Temperature Storage | Temp. : 100°C | 1000 Hrs. | 22 PCS. | 0/1 |
| 5 | Low Temperature Storage | Temp. : -40°C | 1000 Hrs. | 22 PCS. | 0/1 |
| 6 | DC Operating Life | IF = 20 mA | 1000 Hrs. | 22 PCS. | 0/1 |
| 7 | High Temperature / High Humidity | 85°C / 85%RH | 1000 Hrs. | 22 PCS. | 0/1 |

Rev. 1

Page: 9 of 11



67-11UWC/S400-XX/TR8

Precautions For Use

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

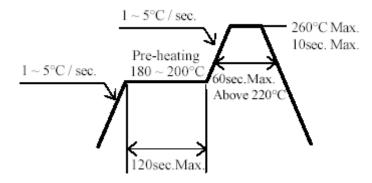

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd.

Device No.: DSE-671-351

http://www.everlight.com

Date:05-Mar-2006 Prepared by:Teresa Lee


Rev. 1 Page: 10 of 11



67-11UWC/S400-XX/TR8

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

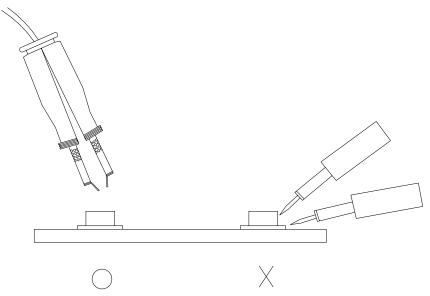

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd.

Device No. :DSE-671-351

http://www.everlight.com

Date:05-Mar-2006

Rev. 1 Page: 11 of 11