ACPF-8025

Band 25 Rx Filter (1930 – 1995 MHz)



Product Brief





Description


The Avago ACPF-8025 is a miniature bandpass filter designed for use as a Rx diversity filter in LTE Band 25 applications such as smartphones, tablets, and mobile/portable communication devices.

The ACPF-8025 is designed with Avago Technologies' innovative Film Bulk Acoustic Resonator (FBAR) technology, which makes possible ultra-small, high-Q filters at a fraction of their usual size.

The ACPF-8025 also utilizes Avago Technologies' advanced Microcap bonded-wafer technology. This chip scale miniaturization process results in a package size of only 1.4×1.1 mm and maximum height of 0.80 mm.

The ACPF-8025 is compatible with high volume, lead-free SMT soldering processes, and can be direct surface-mounted to a PCB or a transfer molded module.

Functional Block Diagram



Features

- 50 Ω Input/Output
- No external matching required
- Low Insertion Loss , High Interference Rejection
- Miniature Size
 - -1.4×1.1 mm Footprint
 - 0.80 mm Max Height
- High Power Rating: +15 dBm Abs Max Input Power
- Environmental
 - RoHS 6 Compliant
 - Halogen free
 - TBBPA Free

Specifications

- Operating temperature: -30 °C to +85 °C
- Low Insertion Loss: 1.2 dB Typ
- High Tx Band Interferer Rejection: 37 dB Min

Applications

Band 25 LTE applications such as smartphones, tablets, and mobile/portable communication devices

Package Outline

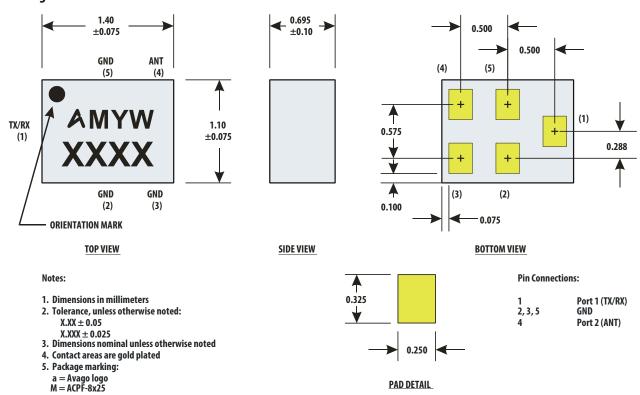


Figure 1. Package Outline Drawing and Marking

Y = Year (last digit) W = Work Week X = Lot number

Ordering Information

| Part Number | No. of Devices | Container |
|---------------|----------------|------------------------|
| ACPF-8025-BLK | 100 | Tape strip or Gel-Pack |
| ACPF-8025-TR1 | 3000 | 7-inch (178 mm) Reel |

AVAGO