

---

## Features

### General

- High-performance, Low-power secureAVR™ RISC Architecture
  - 135 Powerful Instructions (Most Executed in a Single Clock Cycle)
- Low Power Idle and Power-down Modes
- Bond Pad Locations Conforming to ISO 7816-2
- ESD Protection to  $\pm 6000V$
- Operating Ranges: 2.7 to 5.5V
- Compliant with GSM, 3GPP and EMV 2000 Specifications; PC Industry Compatible
- Available in Wafers, Modules, and Industry-standard Packages

### Memory

- 128K Bytes of ROM Program Memory
- 36K Bytes of EEPROM, Including 128 OTP Bytes and 384-byte Bit-addressable Area
  - 1 to 128-byte Program / Erase
  - 1.25 ms Program / 1.25 ms Erase
  - Typically More than 500,000 Write/Erase Cycles at a Temperature of 25°C
  - 10 Years Data Retention
  - EEPROM Erase Only Mode
  - Write EEPROM With or Without Autoerase
- 5K Bytes of RAM
- 32K Bytes of ROM Dedicated to Atmel's Crypto-library

### Peripherals

- One I/O Port
- ISO7816 Controller
  - Up to 625 kbps at 5 MHz
  - Compliant with T= 0 and T= 1 Protocols
- Programmable Internal Oscillator
  - Up to 20 MHz on ROM
  - Up to 40 MHz for Cryptographic Accelerator
- Two 16-bit Timers
- Random Number Generator (RNG)
- 2-level, 7-vector Interrupt Controller
- 32-bit Cryptographic Accelerator for Public Key Operations Including
  - RSA, DSA, ECC, Diffie-Hellman
- Hardware DES and Triple DES DPA Resistant
- Checksum Accelerator
- CRC 16 & 32 Engine (Compliant with ISO/IEC 3309)

### Security

- Dedicated Hardware for Protection Against SPA/DPA Attacks
- Advanced Protection Against Physical Attack, Including Active Shield
- Environmental Protection Systems
- Voltage Monitor
- Frequency Monitor
- Light Protection
- Temperature Monitor
- Secure Memory Management/Access Protection (Supervisor Mode)

### Development Tools

- Voyager Emulation Platform (ATV4) to Support Software Development
- IAR Systems EWAVR® V3.10 Debugger or Atmel's AVR Studio® Version 4.07 or Above
- Software Libraries and Application Notes



---

## Secure Microcontroller for Smart Cards

---

## AT90SC 12836RCT Summary

6508CS-SPD-15May07



Note: This is a summary document. A complete document will be available under NDA. For more information, please contact your local Atmel sales office.

## Certification

- EAL4+
- VISA
- CAST
- ZKA

## Description

AT90SC12836RCT is a low power, high performance, 8/16-bit microcontroller based on the secureAVR™ enhanced RISC architecture, with ROM program memory and EEPROM data memory. By executing powerful instructions in a single clock cycle, the AT90SC12836RCT achieves throughputs close to 1 MIPS per MHz. Its Harvard architecture includes 32 general-purpose working registers directly connected to the ALU, allowing two independent registers to be accessed in one single instruction executed in one clock cycle.

The AT90SC12836RCT uses the secureAVR™ this allows the linear addressing of up to 8M bytes of code and up to 16M bytes of data as well as a number of new functional and security features.


The AT90SC12836RCT includes 36K bytes of Atmel's high density, non volatile memory.

The crypto engine featured in the AT90SC series is the AdvX™, a 32-bit accelerator dedicated to perform fast encryption or authentication functions.

Additional security features include power and frequency protection logic, logical scrambling on all data and addresses, Power Analysis countermeasures and memory accesses controlled by a supervisor mode.

Figure 1 shows the AT90SC12836RCT block diagram.

**Figure 1.** AT90SC12836RCT secureAVR RISC Architecture

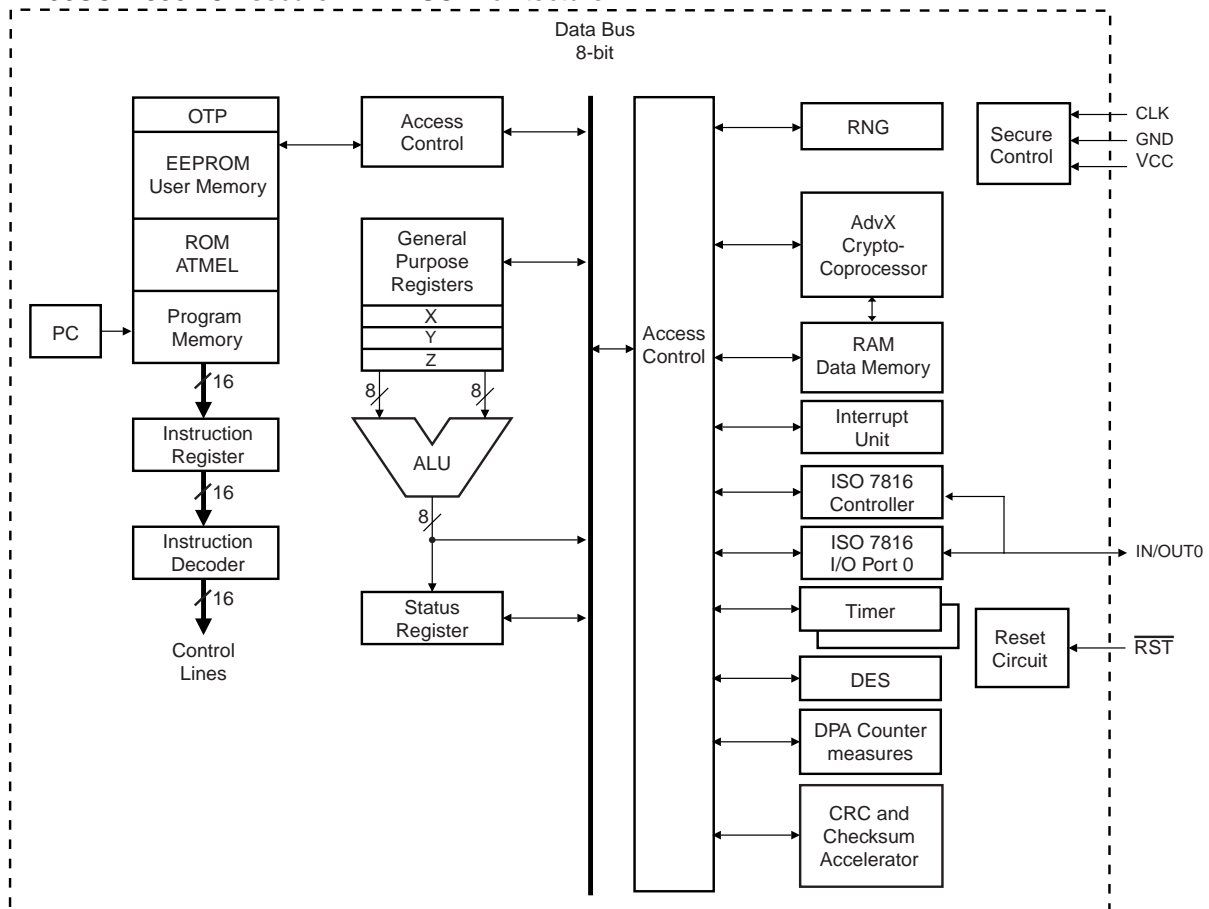



## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Secure Products

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

## Literature Requests

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2007. All rights reserved. Atmel®, logo and combinations thereof, and others are registered trademarks. Everywhere You Are<sup>SM</sup>, and others are the trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.



Printed on recycled paper.

6508CS-SCIC-15May07