

Silicon PNP Power Transistors

2SB1369

DESCRIPTION

- With TO-220 package
- High collector power dissipation
- High current capability

APPLICATIONS

- For general purpose applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector;connected to mounting base
3	Base

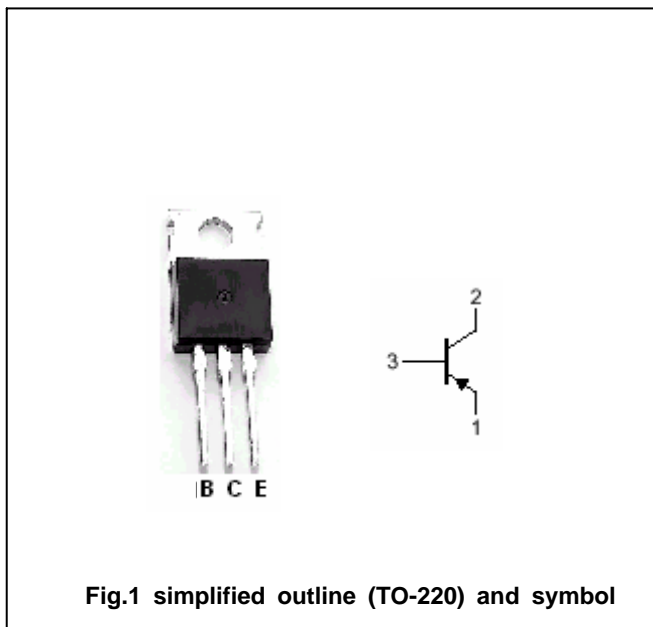


Fig.1 simplified outline (TO-220) and symbol

Absolute maximum ratings(Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-60	V
V_{CEO}	Collector -emitter voltage	Open base	-60	V
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-3	A
I_{CM}	Collector current-peak		-6	A
P_C	Collector power dissipation	$T_a=25$	2.0	W
		$T_C=25$	40	
T_j	Junction temperature		150	
T_{stg}	Storage temperature		-55~150	

Silicon PNP Power Transistors

2SB1369

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-1mA; I _B =0	-60			V
V _{(BR)CBO}	Collector-base breakdown voltage	I _C =-50 μA; I _E =0	-60			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =-50 μA; I _C =0	-5			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-2A; I _B =-0.2A			-1.5	V
V _{BEsat}	Base-emitter saturation voltage	I _C =-2A; I _B =-0.2A			-1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-60V; I _E =0			-10	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-4V; I _C =0			-10	μA
h _{FE}	DC current gain	I _C =-0.5A; V _{CE} =-5V	100		320	
f _T	Transition frequency	I _C =-0.5A; V _{CE} =-5V		15		MHz
C _{OB}	Collector output capacitance	f=1MHz; V _{CB} =10V		80		pF

Silicon PNP Power Transistors

2SB1369

PACKAGE OUTLINE

