

### GLASS PASSIVATED RECTIFIER

VOLTAGE RANGE: 50 --- 1000 V  
CURRENT: 1.0 A


#### FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

#### MECHANICAL DATA

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

#### DO - 41

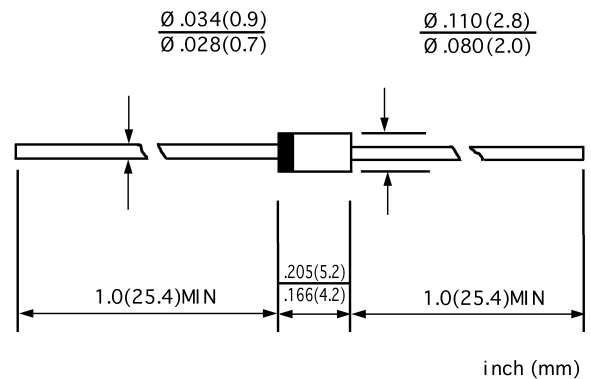

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.


		UF 4001G	UF 4002G	UF 4003G	UF 4004G	UF 4005G	UF 4006G	UF 4007G	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	$I_{FSM}$	30.0							A
Maximum instantaneous forward voltage @1.0 A	$V_F$	1.0			1.7			V	
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	$I_R$	10.0 100.0							$\mu A$
Maximum reverse recovery time (Note1)	$t_{rr}$	50			75			ns	
Typical junction capacitance (Note2)	$C_J$	20			10			pF	
Typical thermal resistance (Note3)	$R_{\theta JA}$	50.0							$^\circ C/W$
Operating junction temperature range	$T_J$	- 55---- +175							$^\circ C$
Storage temperature range	$T_{STG}$	- 55---- +175							$^\circ C$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


www.galaxycn.com

2. Thermal resistance from junction to ambient.


**FIG.1 – FORWARD CURRENT DERATING CURVE**

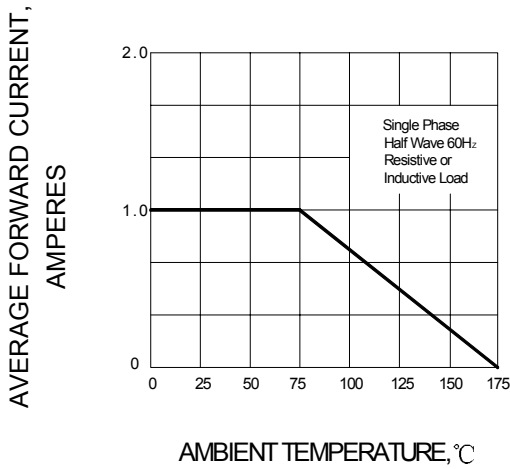


**FIG.2 – PEAK FORWARD SURGE CURRENT**

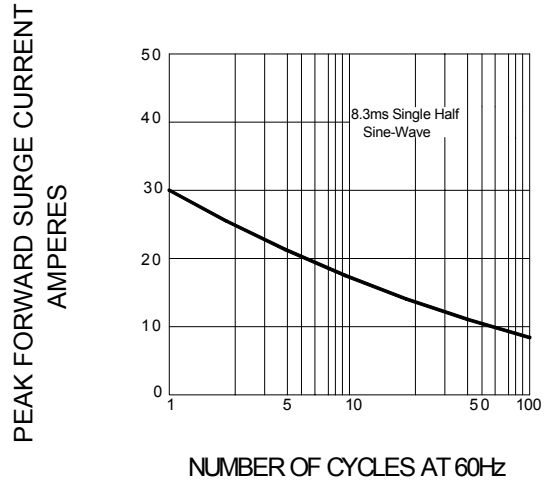

**FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

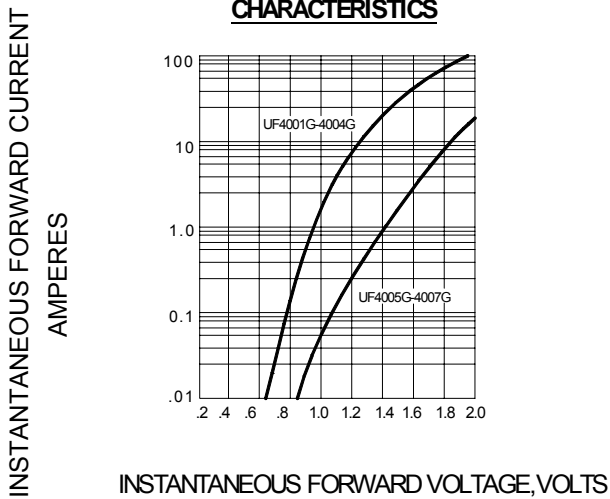

**FIG.4 – TYPICAL REVERSE CHARACTERISTICS**

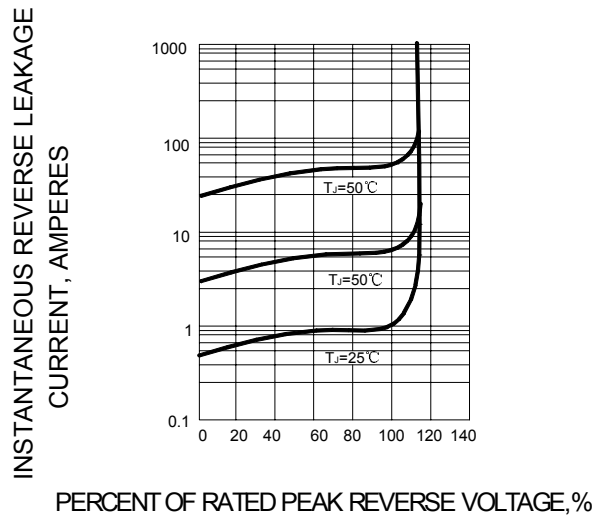

**FIG.5 – TYPICAL JUNCTION CAPACITANCE**

