




Thermoelectric Cooler


MI6030

Performance Values

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (Vacuum):	133	150
Qmax (watts):	0.58	0.65
I _{max} (amps):	3.6	3.7
V _{max} (vdc):	6.3	7.2
AC Resistance (ohms):	1.65	---

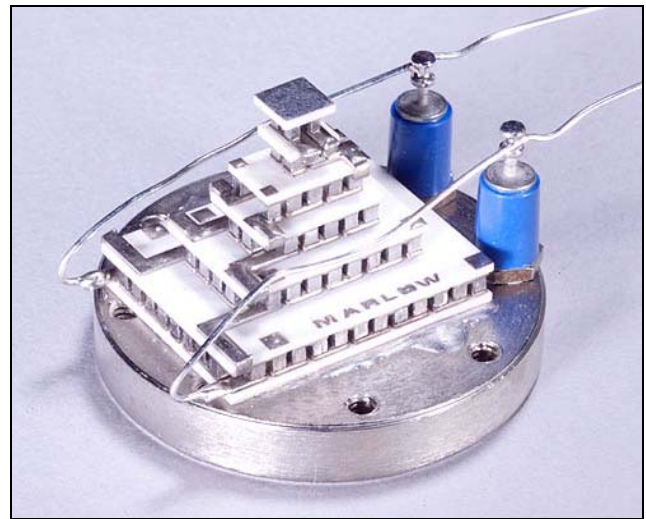

Mechanical Characteristics

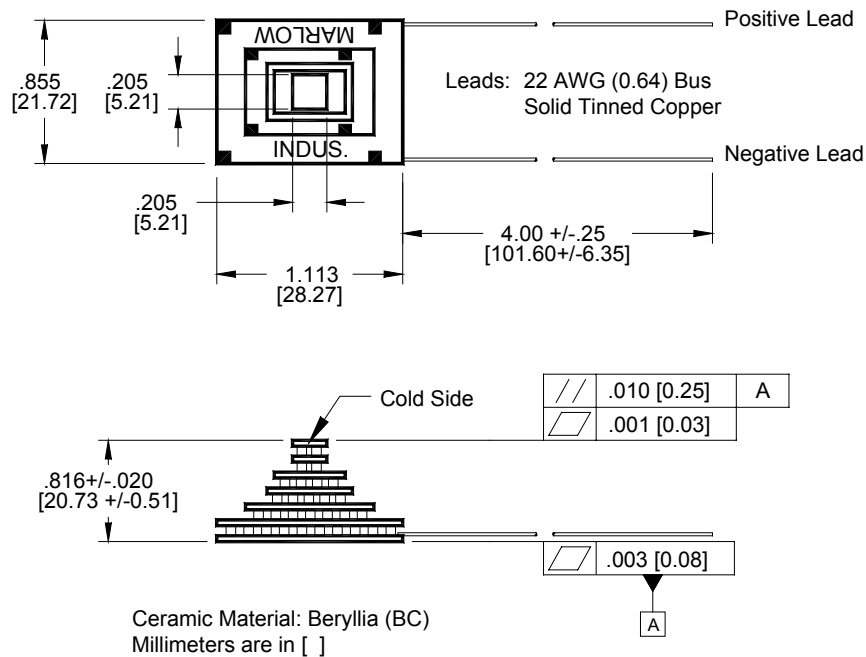

Ordering Options

MI6030-01	both surfaces are metallized – cooler is mounted and shipped on test base
MI6030-02	hot side exterior is metallized – cooler is mounted and shipped on test base
MI6030-03	no exterior metallization



- For example, and MI6030 with only the hot side metallized is specified as an MI6030-02BC
- Pretinned metallized ceramic surface(s) with 117°C solder.
- Thermistor mounted on edge of cold side ceramic. (Calibration available.)
- Elevated temperature burn-in with test data provided.

Performance Curves

Environment: Vacuum

Hot Side Temperature: 27°C

Hot Side Temperature: 50°C

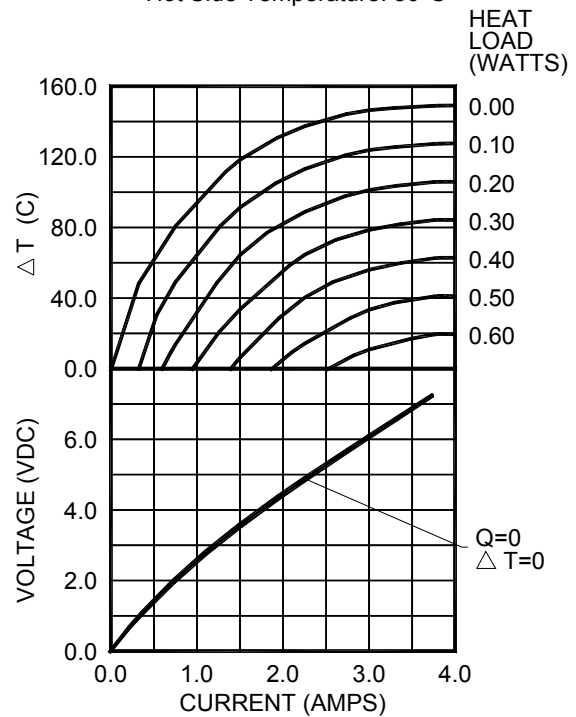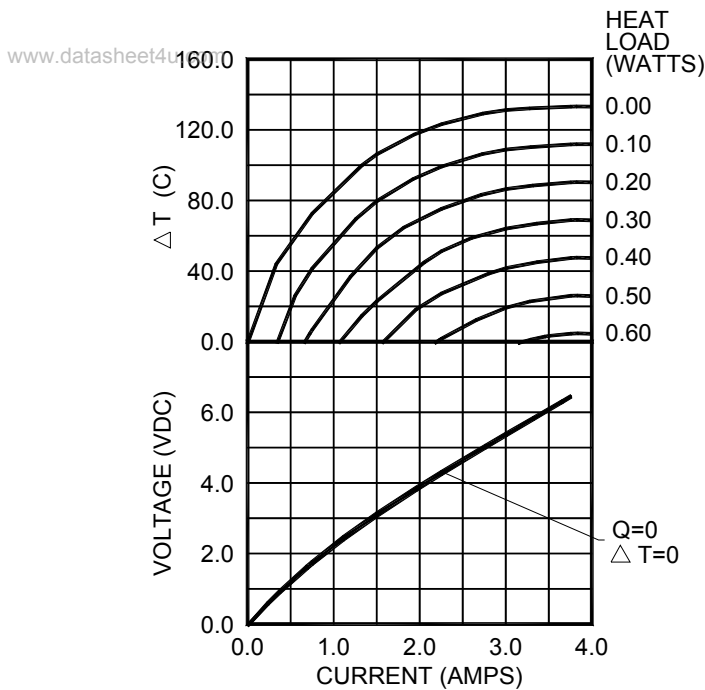

For performance information with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

Installation

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

Operation Cautions

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.



Marlow Industries, Inc.

10451 Vista Park Road
 Dallas Texas 75238-1645
 TEL: 214-340-4900
 FAX: 214-341-5212

Internet: <http://www.marlow.com>

Marlow Industries Europe

Aberdeen House, South Road
 Haywards Heath
 West Sussex RH164NG UK
 TEL: +44 (0)1444-443404
 FAX: +44 (0)1444-443334

Marlow Industries Asia

1-1-8-401
 Uehara, Shibuya-ku
 Tokyo, Japan 151-0064
 TEL: +81 (3) 5454-5280
 FAX: +81 (3) 5454-5281