



PDZ4.7B ~ PDZ36B

SURFACE MOUNT SILICON ZENER DIODES

VOLTAGE 4.7 to 36 Volts

POWER 400 mWatts

SOD-323



Unit : inch(mm)

FEATURES

- Planar Die construction
- 400mW Power Dissipation
- Ideally Suited for Automated Assembly Processes
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOD-323, Molded Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: See Diagram Below
- Weight: 0.00014 ounces, 0.0041 grams
- Mounting Position: Any

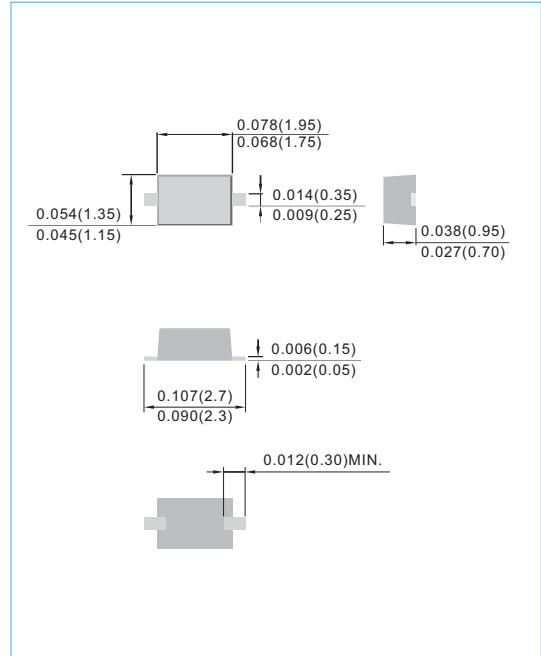

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	LIMITS	UNIT
Maximum Power Dissipation (Note A) at 25°C	P_D	400	mW
Operating Junction and Storage Temperature Range	T_J	-55 to + 150	°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	325	°C/W

NOTE:

A.Mounted on 5.0mm²(.013mm thick) land areas



PDZ4.7B ~ PDZ36B

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking Code
	V _Z @ I _{ZT}			Z _{ZT} @ I _{ZT}		Z _{ZK} @ I _{ZK}		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
400 mWatts Zener Diodes										
PDZ4.7B	4.7	4.55	4.75	90	5	600	1	0.75	1.5	Z7
PDZ5.1B	5.1	4.96	5.2	60	5	800	0.5	0.75	1.5	Z8
PDZ5.6B	5.6	5.50	5.71	50	5	400	0.5	0.50	3.0	Z9
PDZ6.2B	6.2	6.06	6.33	50	5	80	0.5	0.50	3.0	ZA
PDZ6.8B	6.8	6.65	6.93	40	5	60	0.5	0.50	3.5	ZB
PDZ7.5B	7.5	7.28	7.60	10	5	60	0.5	0.50	4.0	ZC
PDZ8.2B	8.2	8.02	8.36	10	5	60	0.5	0.50	5.0	ZD
PDZ9.1B	9.1	8.85	9.23	10	5	60	0.5	0.50	6.0	ZE
PDZ10B	10	9.77	10.21	10	5	60	0.5	0.10	7.0	ZF
PDZ11B	11	10.78	11.22	10	5	60	0.5	0.10	8.0	ZG
PDZ12B	12	11.74	12.24	10	5	80	0.5	0.10	9.0	ZH
PDZ13B	13	12.91	13.49	10	5	80	0.5	0.10	10.0	ZJ
PDZ15B	15	14.34	14.98	15	5	80	0.5	0.05	11.0	ZK
PDZ16B	16	15.85	16.51	20	5	80	0.5	0.05	12.0	ZL
PDZ18B	18	17.56	18.35	20	5	80	0.5	0.05	13.0	ZM
PDZ20B	20	19.52	20.39	20	5	100	0.5	0.05	15.0	ZN
PDZ22B	22	21.54	22.47	25	5	100	0.5	0.05	17.0	ZP
PDZ24B	24	23.72	24.78	30	5	120	0.5	0.05	19.0	ZQ
PDZ27B	27	26.19	27.53	40	5	150	0.5	0.05	21.0	ZR
PDZ30B	30	29.19	30.69	40	5	200	0.5	0.05	23.0	ZS
PDZ33B	33	32.15	33.79	40	5	250	0.5	0.05	25.0	ZT
PDZ36B	36	35.07	36.87	60	5	300	0.5	0.05	27.0	ZU



PDZ4.7B ~ PDZ36B

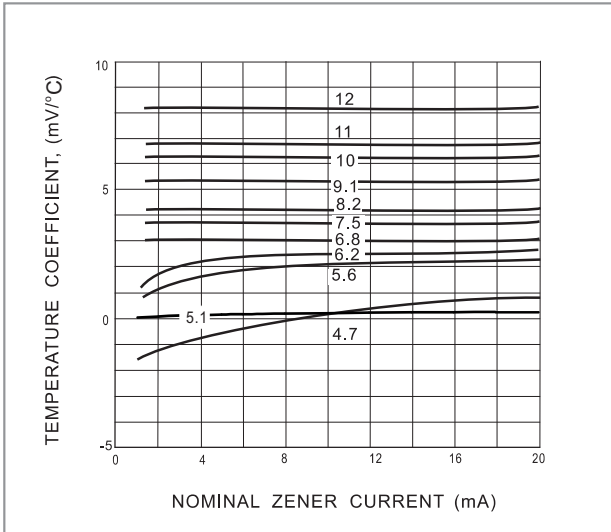


Fig.1 TEMPERATURE COEFFICIENTS AS FUNCTION OF WORKING CURRENT ; TYPICAL VALUES

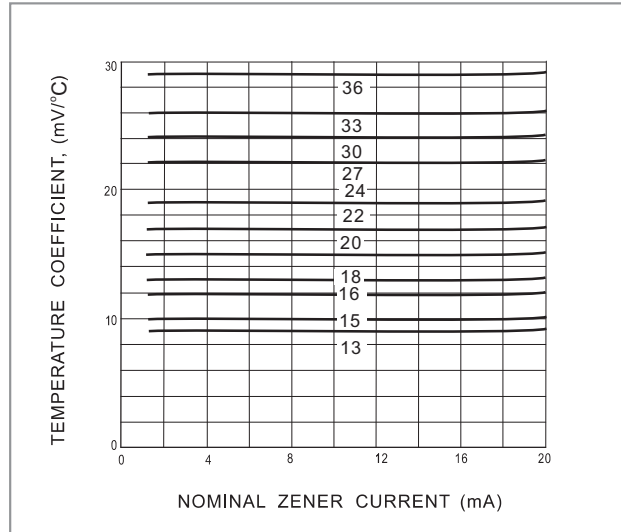


Fig.2 TEMPERATURE COEFFICIENTS AS FUNCTION OF WORKING CURRENT ; TYPICAL VALUES

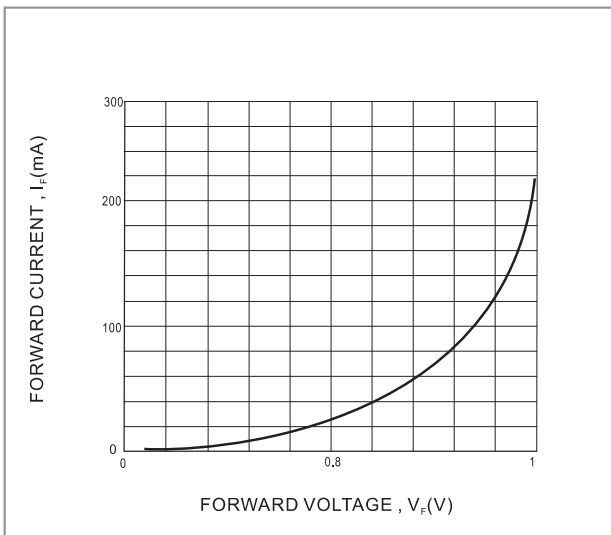


Fig.3 Forward current as a function of forward voltage ; typical values

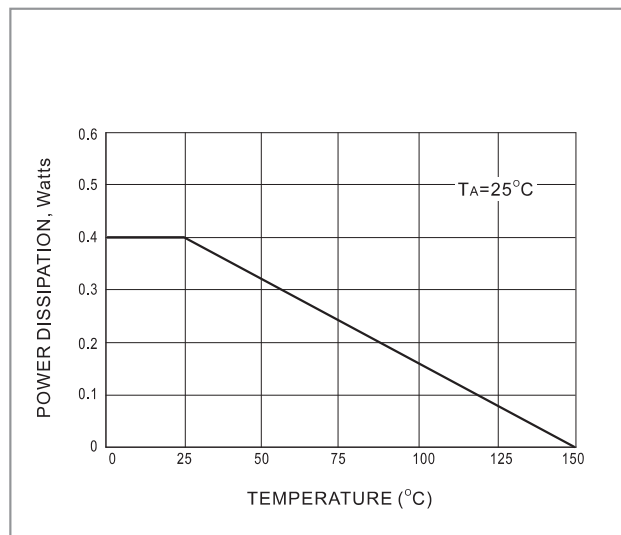


Fig.4 POWER DERATING CURVE

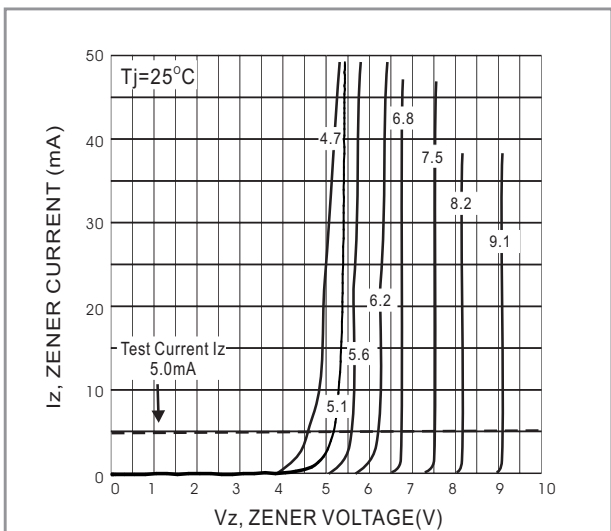


Fig.5 ZENER BREAKDOWN CHARACTERISTICS


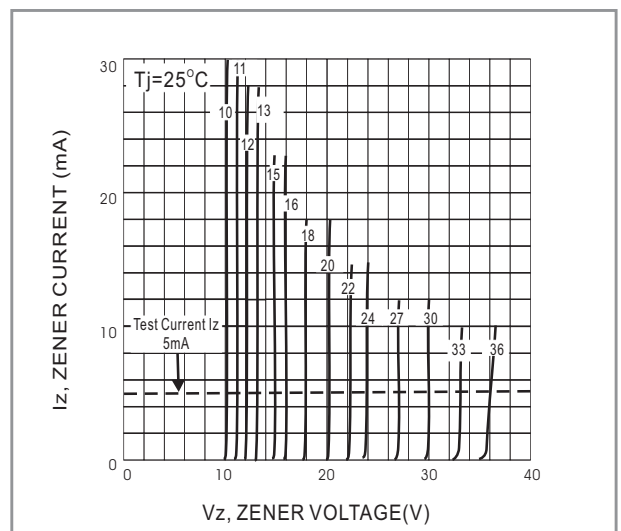


Fig.6 ZENER BREAKDOWN CHARACTERISTICS



PDZ4.7B ~ PDZ36B

MOUNTING PAD LAYOUT

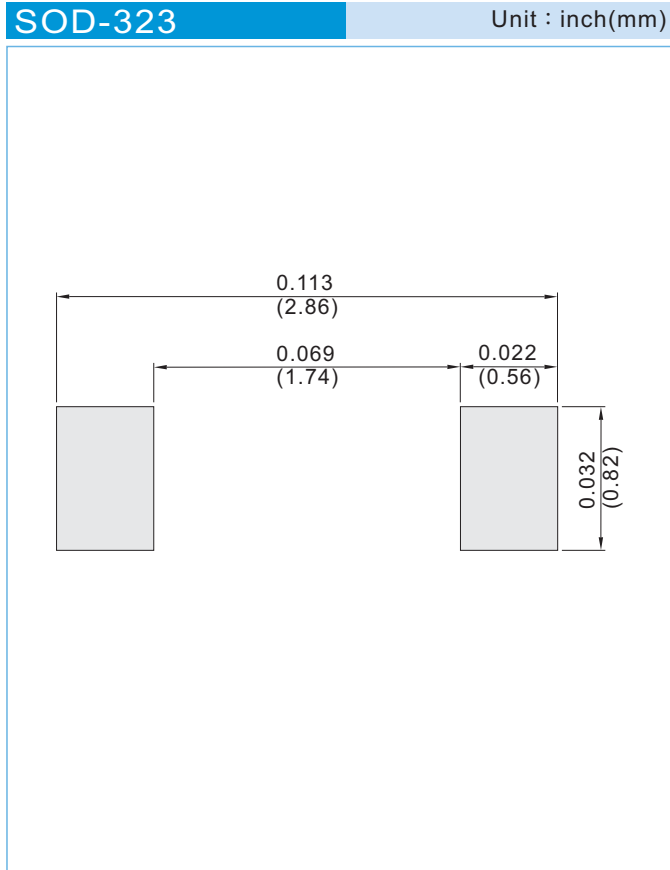

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.




PDZ4.7B ~ PDZ36B

Part No_packing code_Version

For example :

RB500V-40_R2_00000

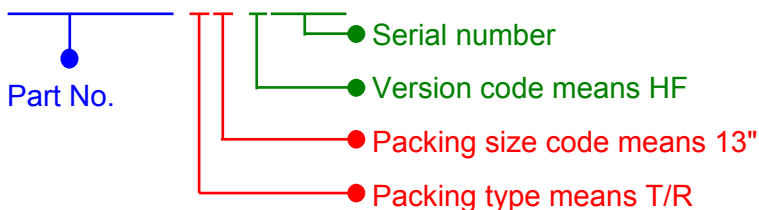

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
T/B	A	N/A	0	HF	0	serial number
T/R	R	7"	1	RoHS	1	serial number
B/P	B	13"	2			
T/P	T	26mm	X			
TRR	S	52mm	Y			
TRL	L	PBCU	U			
FORMING	F	PBCD	D			

Part No_packing code_Version

PDZ4.7B_R1_00001

PDZ4.7B_R2_00001