

500V / 18A
N-Channel Enhancement Mode MOSFET

500V, $R_{DS(ON)}=0.32\Omega @ V_{GS}=10V, I_D=9A$

Features

- Low On-State Resistance
- Fast Switching
- Low Gate Charge & Low C_{RSS}
- Fully Characterized Avalanche Voltage and Current
- Specially Designed for AC Adapter, Battery Charger and SMPS
- In compliance with EU RoHs 2002/95/EC Directives


Mechanical Information

- Case: TO-3PN Molded Plastic
- Terminals : Solderable per MIL-STD-750, Method 2026

Marking & Ordering Information

TYPE	MARKING	PACKAGE	PACKING
HY18N50W	18N50W	TO-3PN	30PCS/TUBE

TO-3PN

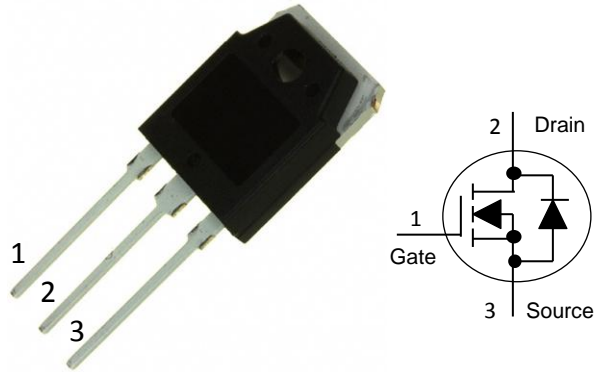

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Units
Drain-Source Voltage	V_{DS}	500	V
Gate-Source Voltage	V_{GS}	± 30	V
Continuous Drain Current	I_D	18	A
Pulsed Drain Current ¹⁾	I_{DM}	72	A
Maximum Power Dissipation	P_D	200	W
Derating Factor		1.6	
Avalanche Energy with Single Pulse $L=30\text{mH}, I_{AS}=8.6\text{A}, V_{DS}=140\text{V}$	E_{AS}	1050	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Note : 1. Maximum DC current limited by the package

Thermal Characteristics

Parameter	Symbol	Value	Units
Junction-to-Case Thermal Resistance	$R_{\theta JC}$	0.62	$^\circ\text{C/W}$
Junction-to-Ambient Thermal Resistance	$R_{\theta JA}$	40	$^\circ\text{C/W}$

COMPANY RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN · FUNCTIONS AND RELIABILITY WITHOUT NOTICE

Electrical Characteristics ($T_C=25$, Unless otherwise noted)

Paramter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V \cdot I_D=250\mu A$	500	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS} \cdot I_D=250\mu A$	2	-	4	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=10V \cdot I_D=9A$	-	0.26	0.32	Ω
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=500V \cdot V_{GS}=0V$	-	-	1.0	μA
Gate Body Leakage Current	I_{GSS}	$V_{GS}=\pm 30V \cdot V_{DS}=0V$	-	-	± 100	nA
Dynamic						
Total Gate Charge	Qg	$V_{DS}=400V \cdot I_D=18A$ $V_{GS}=10V$	-	52.2	-	nC
Gate-Source Charge	Qgs		-	10.8	-	
Gate-Drain Charge	Qgd		-	14.8	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=250V \cdot I_D=18A$ $V_{GS}=10V \cdot R_G=25\Omega$	-	21.8	32	ns
Turn-On Rise Time	t_r		-	36.8	46	
Turn-Off Delay Time	$t_{d(off)}$		-	88.2	112	
Turn-Off Fall Time	t_f		-	46	66	
Input Capacitance	C_{iss}	$V_{DS}=25V \cdot V_{GS}=0V$ $f=1.0MHz$	-	2250	2650	pF
Output Capacitance	C_{oss}		-	320	420	
Reverse Transfer Capacitance	C_{riss}		-	7.4	12	
Source-Drain Diode						
Max. Diode Forwad Voltage	I_S	-	-	-	18	A
Max. Pulsed Source Current	I_{SM}	-	-	-	72	A
Diode Forward Voltage	V_{SD}	$I_S=18A \cdot V_{GS}=0V$	-	-	1.5	V
Reverse Recovery Time	t_{rr}	$V_{GS}=0V \cdot I_S=18A$ $di/dt=100A/\mu s$	-	480	-	ns
Reverse Recovery Charge	Q_{rr}		-	4.5	-	μC

NOTE : Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$

Typical Characteristics Curves ($T_C=25^\circ\text{C}$, unless otherwise noted)

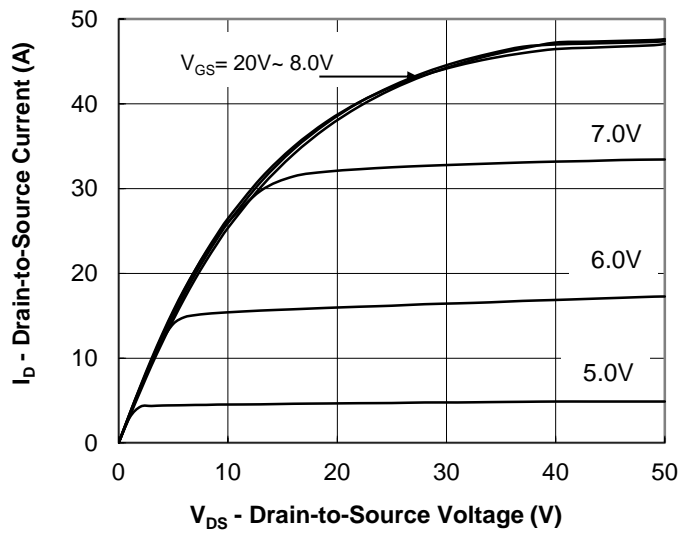


Fig.1 Output Characteristic

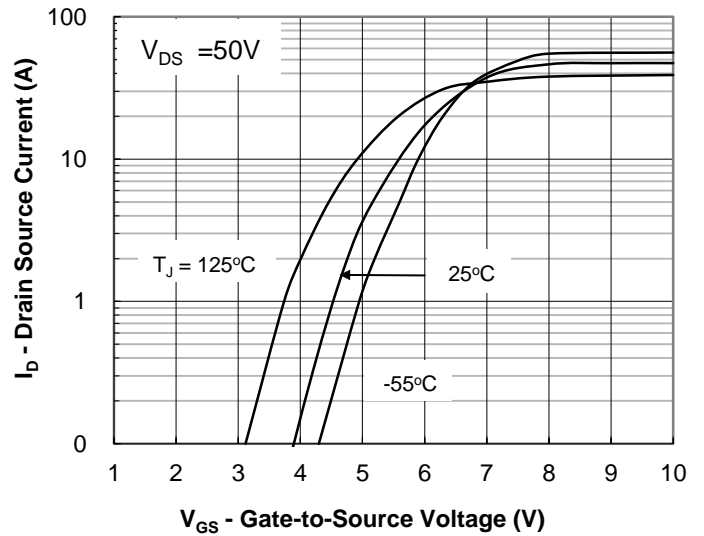


Fig.2 Transfer Characteristic

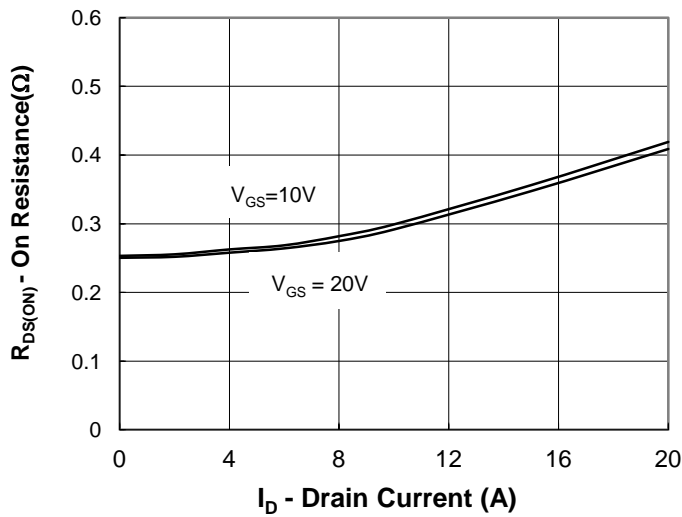


Fig.3 On-Resistance vs Drain Current

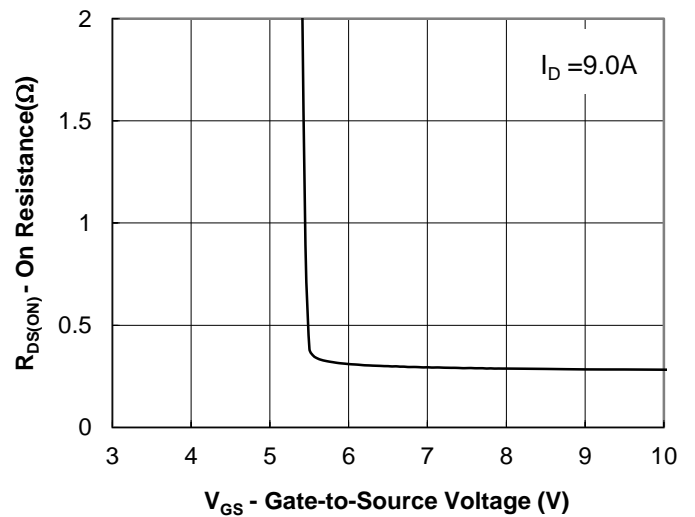


Fig.4 On-Resistance vs Gate to Source Voltage

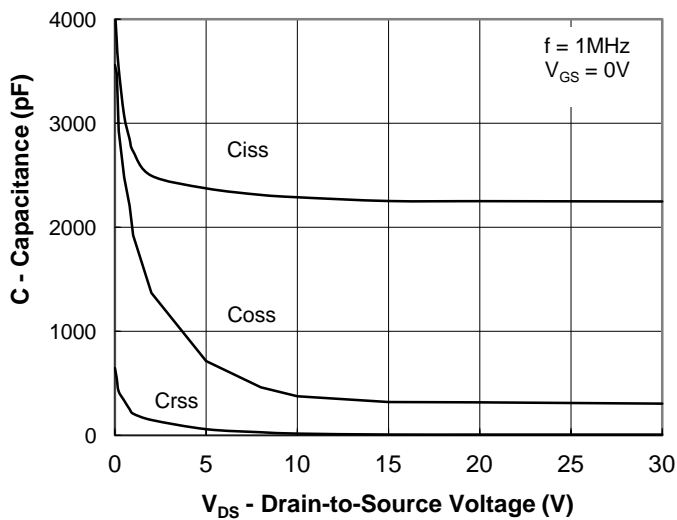


Fig.5 Capacitance Characteristic

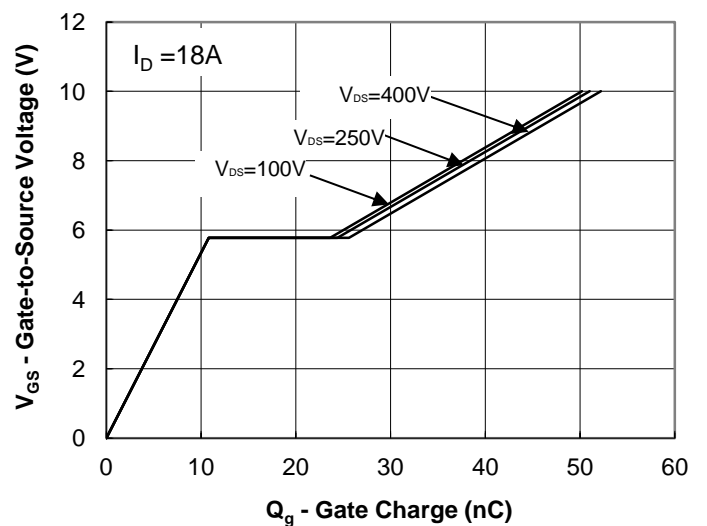


Fig.6 Gate Charge Characteristic

Typical Characteristics Curves ($T_C=25^\circ\text{C}$, unless otherwise noted)

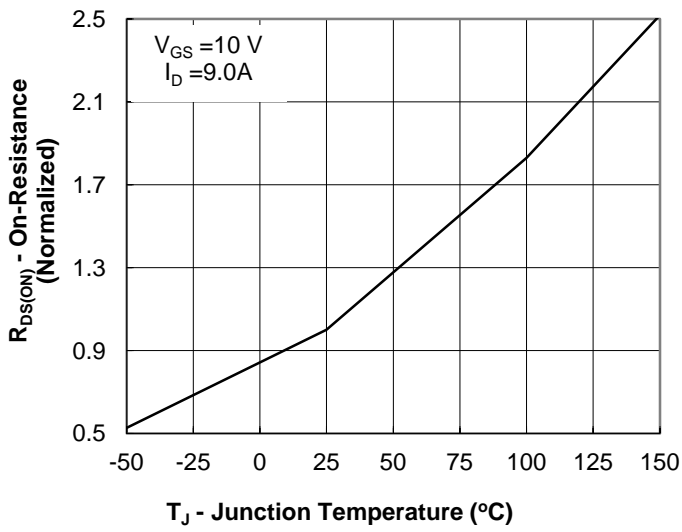


Fig.7 On-Resistance vs Junction Temperature

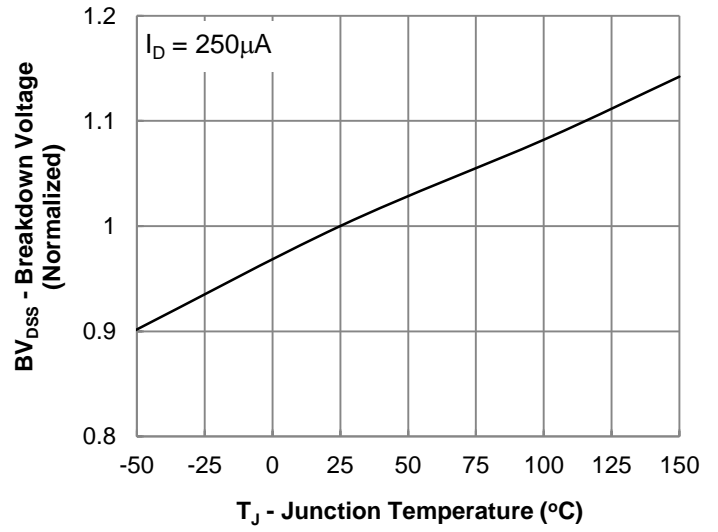


Fig.8 Breakdown Voltage vs Junction Temperature

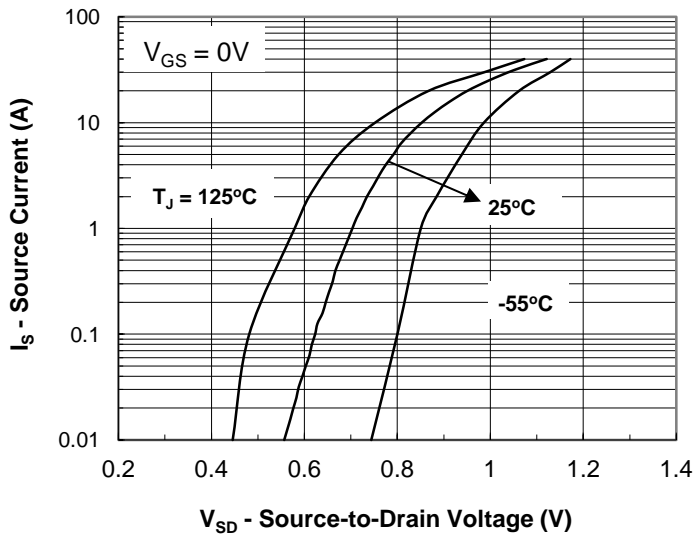


Fig.9 Body Diode Forward Voltage Characteristic