

Fig. 1

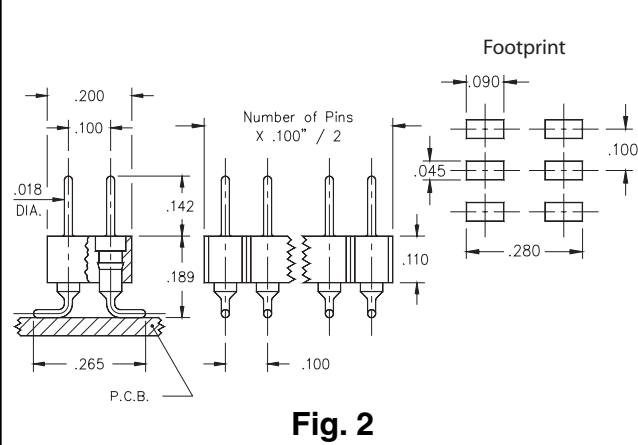


Fig. 2

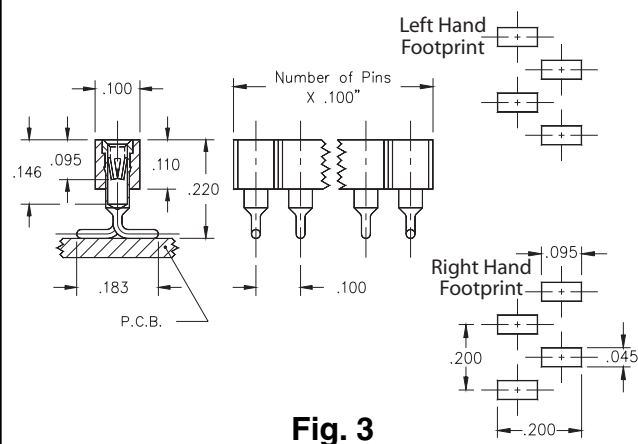


Fig. 3


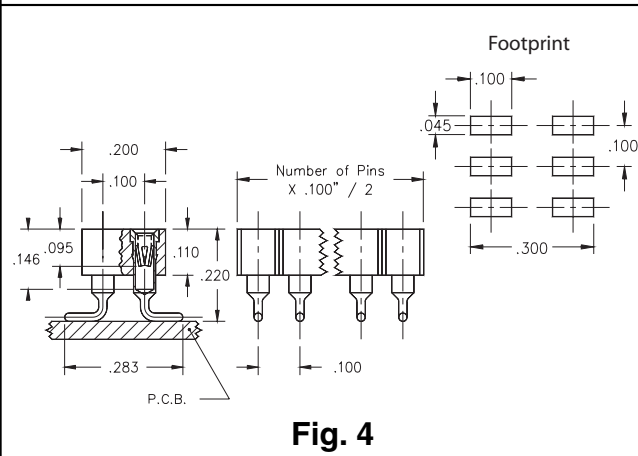


Fig. 4

- Series 310 and 350 interconnects are available in single and double row form.
- Single row interconnects having an even number of pins are now available with a left or right hand footprint.
- Headers (350 & 450) use MM# 3404 pins. (See page 170 for details)
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. (See page 135 for details)
- Insulators are high temp. thermoplastic.

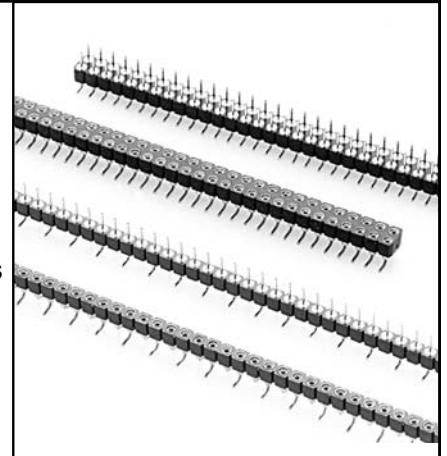

Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins		
	350-XX-1__-00-106 Specify # of pins → 01-64		
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins		
	350-XX-1__-00-107 Specify even # of pins → 02-64		
Fig. 2	Double Row Header, Even # of pins		
	450-XX-2__-00-106 Specify even # of pins → 02-72		
SPECIFY PLATING CODE XX=		10	90
Pin Plating		10μ" Au	200μ" Sn/Pb
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins		
	310-XX-1__-41-105 Specify # of pins → 01-64		
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins		
	310-XX-1__-41-107 Specify even # of pins → 02-64		
Fig. 4	Double Row Socket, Even # of pins		
	410-XX-2__-41-105 Specify even # of pins → 02-72		
SPECIFY PLATING CODE XX=		93	99
Sleeve (Pin)		200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)		30μ" Au	200μ" Sn/Pb