
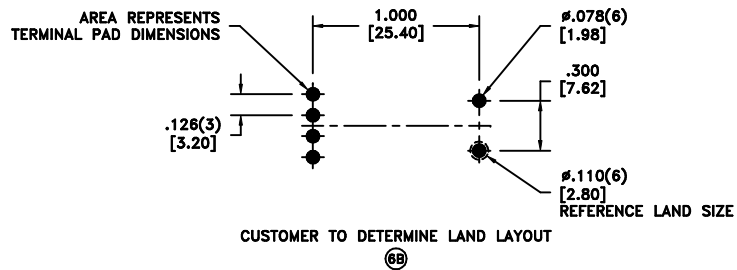



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect

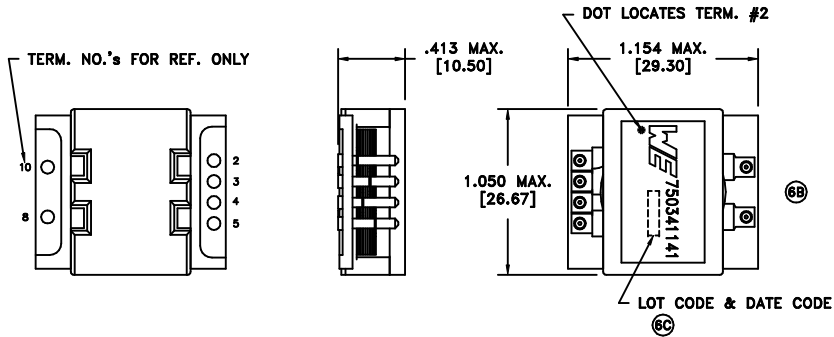

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	6.0 mOhms max.
D.C. RESISTANCE	3-5 @20°C	6.0 mOhms max.
D.C. RESISTANCE	8-10 @20°C	3.0 mOhms max.
INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	480.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 8+10), 100kHz, 100mVAC, Ls	800nH max.
DIELECTRIC	tie(3+4), 500VDC, 1 second	-
TURNS RATIO	(2-4):(8-10)	1.667:1, ±1%
TURNS RATIO	(3-5):(8-10)	1.667:1, ±1%

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT
6C	11/12	Method: <b>Tape &amp; Reel</b> PKG-0793	
6B	4/12	www.we-online.com/midcom	
6A	10/11	SEE REVISION SHEET FOR	REVISION LEVEL

Tolerances unless otherwise specified:  
 Angles: ±1°      Decimals: ±.005 [.13]  
 Fractions: ±1/64      Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE  
**TRANSFORMER**

eiSos p/n: 750341141

PART NO.  
**750341141**

SPECIFICATION SHEET 1 OF 1