



ALPHA & OMEGA
SEMICONDUCTOR

AOD4184/AOI4184
40V N-Channel MOSFET

General Description

The AOD4184/AOI4184 used advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. With the excellent thermal resistance of the DPAK package, those devices are well suited for high current load applications.

Product Summary


V_{DS}	40V
I_D (at $V_{GS}=10V$)	50A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	< 8mΩ
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	< 11mΩ

100% UIS Tested
100% R_g Tested




TO252
DPAK

Top View




Bottom View





TO-251A
IPAK

Top View



Bottom View



Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ^G	I_D	50	A
$T_C=100^\circ C$		40	
Pulsed Drain Current ^C	I_{DM}	120	
Continuous Drain Current	I_{DSM}	12	A
$T_A=70^\circ C$		9.5	
Avalanche Current ^C	I_{AS}, I_{AR}	35	A
Avalanche energy $L=0.1mH$ ^C	E_{AS}, E_{AR}	61	mJ
Power Dissipation ^B	P_D	50	W
$T_C=100^\circ C$		25	
Power Dissipation ^A	P_{DSM}	2.3	W
$T_A=70^\circ C$		1.5	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	18	22	°C/W
Maximum Junction-to-Ambient ^{A,D}		44	55	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	2.4	3	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	40			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=40\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm20\text{V}$			±100	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	1.7	2.2	2.6	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	120			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=20\text{A}$ $T_J=125^\circ\text{C}$	6.7	8		$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, I_D=15\text{A}$	11	13		
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}, I_D=20\text{A}$	37			S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$	0.72	1		V
I_S	Maximum Body-Diode Continuous Current				20	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=20\text{V}, f=1\text{MHz}$	1200	1500	1800	pF
C_{oss}	Output Capacitance		150	215	280	pF
C_{rss}	Reverse Transfer Capacitance		80	135	190	pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	2	3.5	5	Ω
SWITCHING PARAMETERS						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=20\text{V}, I_D=20\text{A}$	21	27.2	33	nC
$Q_g(4.5\text{V})$	Total Gate Charge		10	13.6	16	nC
Q_{gs}	Gate Source Charge			4.5		nC
Q_{gd}	Gate Drain Charge			6.4		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=20\text{V}, R_L=1\Omega, R_{\text{GEN}}=3\Omega$		6.4		ns
t_r	Turn-On Rise Time			17.2		ns
$t_{\text{D(off)}}$	Turn-Off Delay Time			29.6		ns
t_f	Turn-Off Fall Time			16.8		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=20\text{A}, dI/dt=100\text{A}/\mu\text{s}$	20	29	38	ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=20\text{A}, dI/dt=100\text{A}/\mu\text{s}$	18	26	34	nC

A. The value of R_{QJA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{ C}$. The Power dissipation P_{DSM} is based on R_{QJA} and the maximum allowed junction temperature of 150° C . The value in any given application depends on the user's specific board design, and the maximum temperature of 175° C may be used if the PCB allows it.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=175^\circ\text{ C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=175^\circ\text{ C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{ C}$.

D. The R_{QJA} is the sum of the thermal impedance from junction to case R_{QJC} and case to ambient.

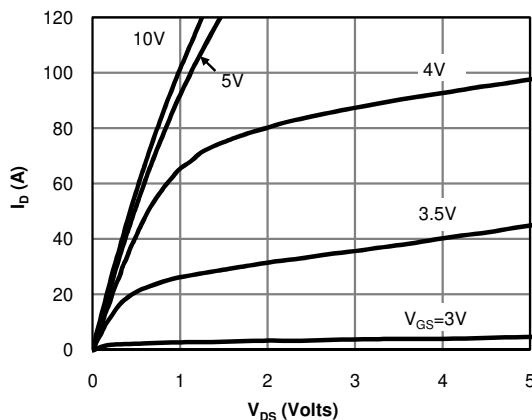
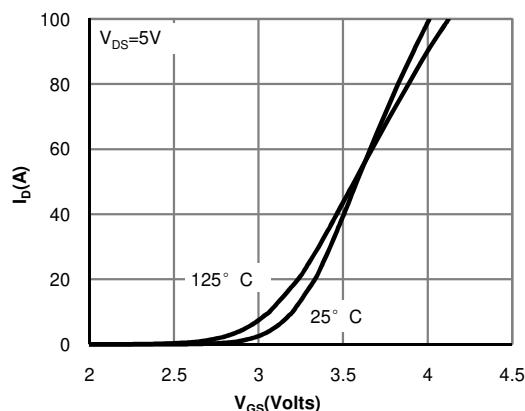
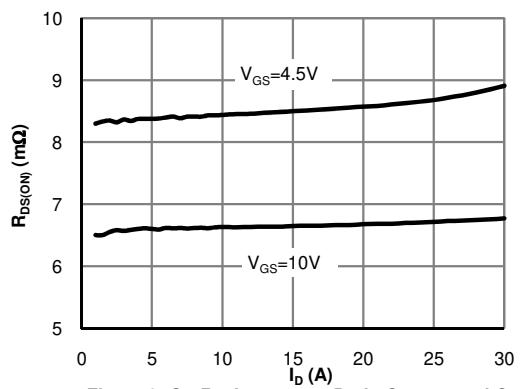
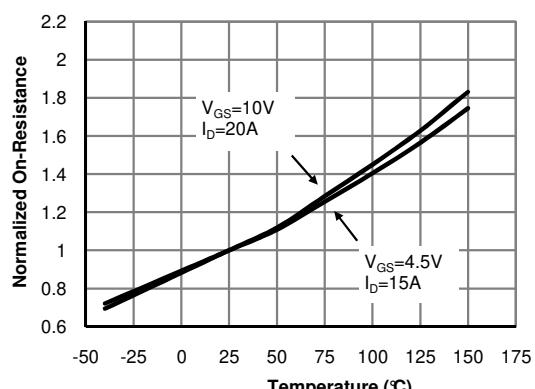
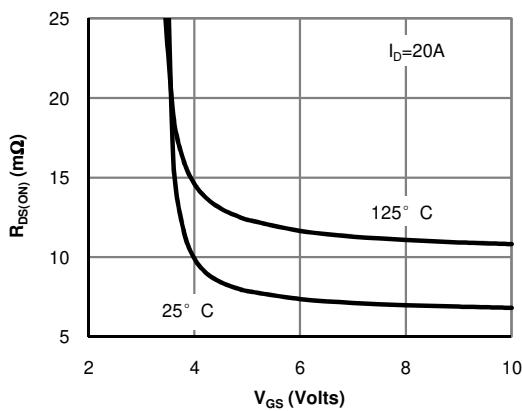
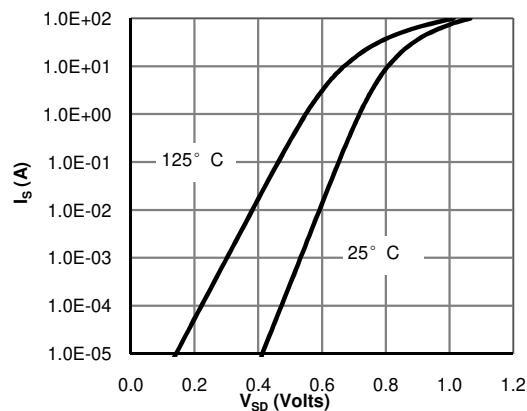
E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

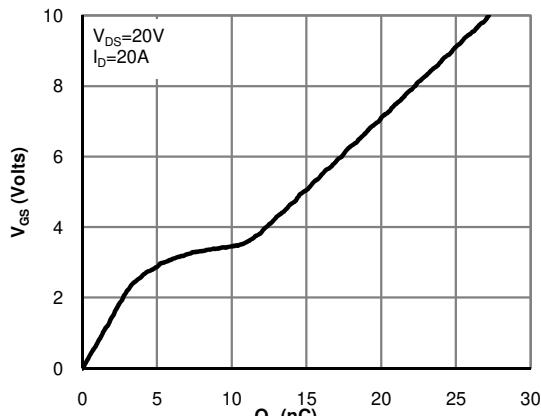
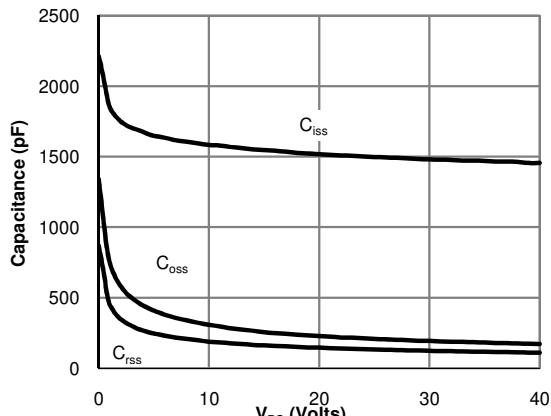
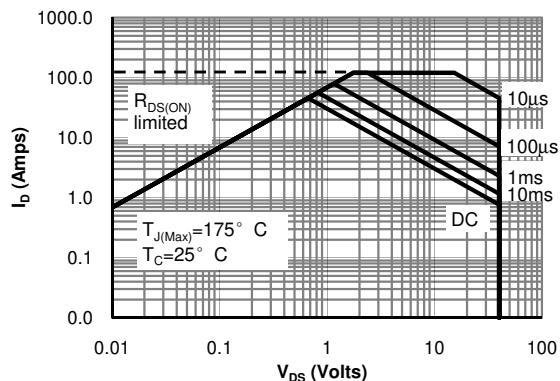
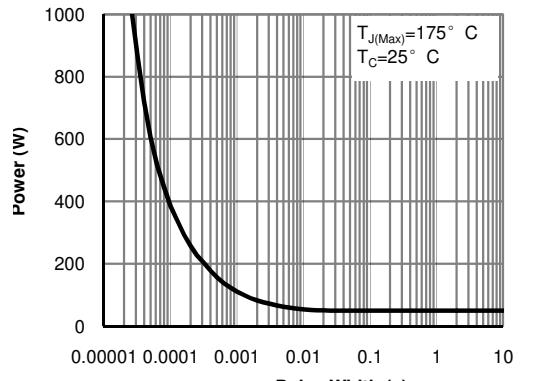
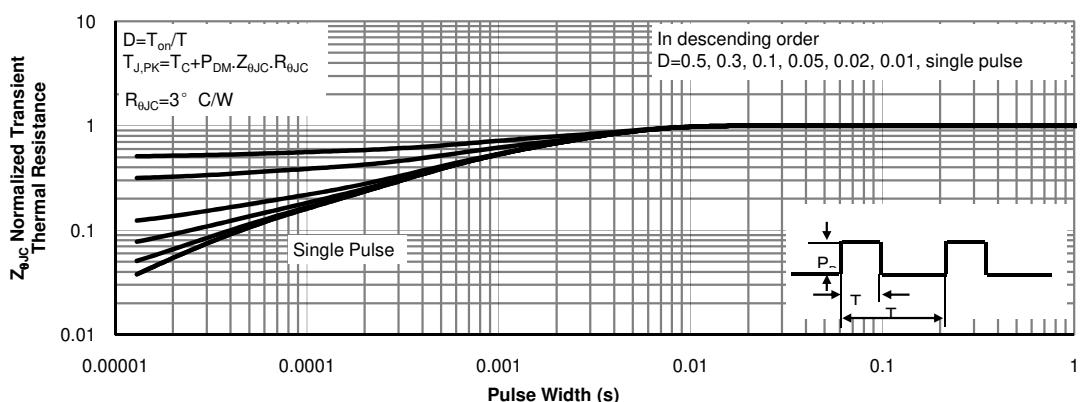
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(\text{MAX})}=175^\circ\text{ C}$. The SOA curve provides a single pulse rating.

G. The maximum current rating is package limited.

H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{ C}$.

COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Fig 1: On-Region Characteristics (Note E)

Figure 2: Transfer Characteristics (Note E)

Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

Figure 4: On-Resistance vs. Junction Temperature (Note E)

Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

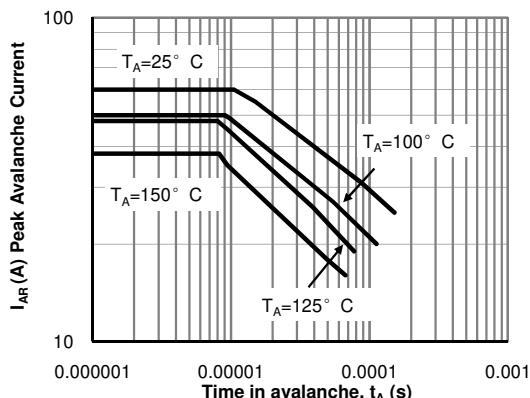
TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Figure 12: Single Pulse Avalanche capability (Note C)

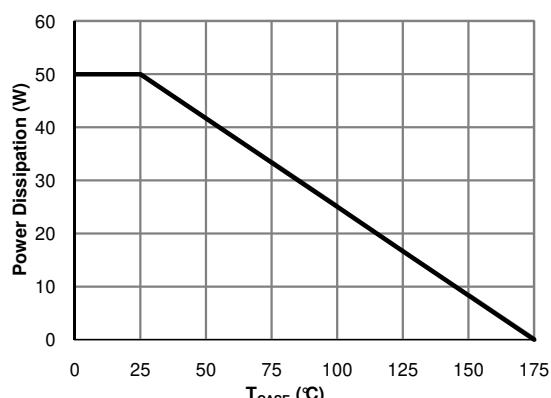


Figure 13: Power De-rating (Note F)

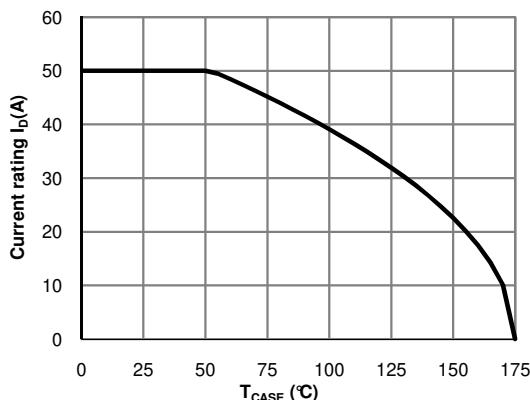


Figure 14: Current De-rating (Note F)

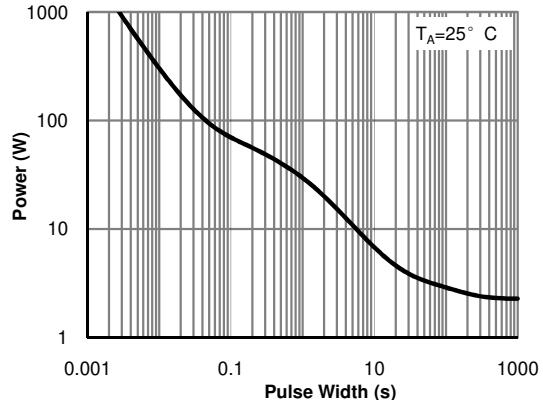


Figure 15: Single Pulse Power Rating Junction-to-Ambient (Note H)

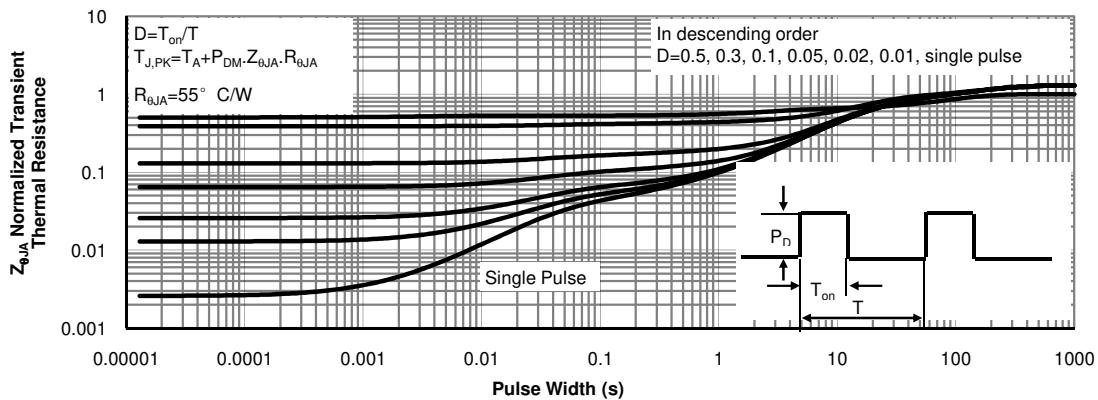
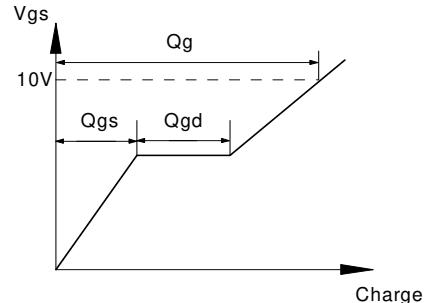
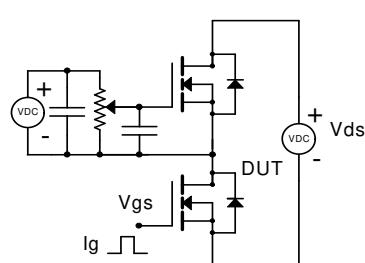
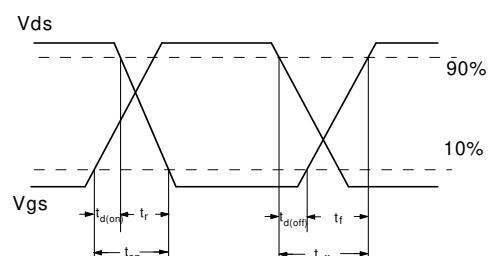
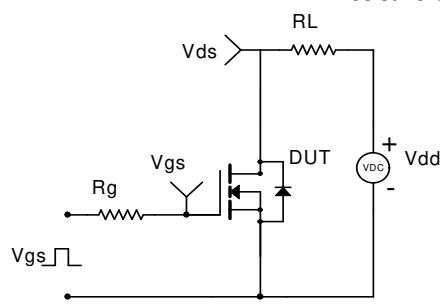
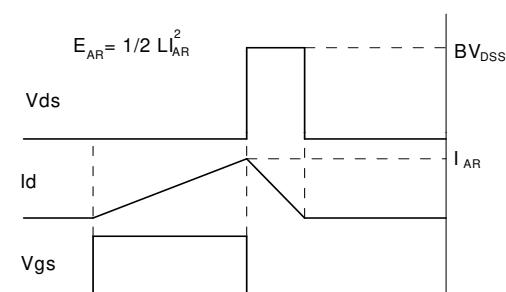
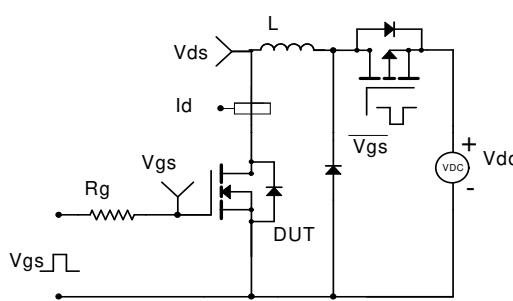


Figure 16: Normalized Maximum Transient Thermal Impedance (Note H)

Gate Charge Test Circuit & Waveform

Resistive Switching Test Circuit & Waveforms

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

Diode Recovery Test Circuit & Waveforms
